

Analysis of Removing Particulates and SO₂ from Coal Combustion Emissions Using Cyclone and Wet Scrubber With Textile Wastewater Feed

by Haryono S Huboyo

Submission date: 14-Dec-2020 11:24AM (UTC+0700)

Submission ID: 1474303309

File name: al_Combustion_Emissions_Using_Cyclone_and_Wet_Scrubber_With.pdf (618.42K)

Word count: 4412

Character count: 23270

Analysis of Removing Particulates and SO₂ from Coal Combustion Emissions Using Cyclone and Wet Scrubber With Textile Wastewater Feed

Haryono Setiyo Huboyo*, Sudarno

Environmental Engineering Department, Faculty of Engineering, Universitas Diponegoro
Jl. Prof. Soedarto, SH, Kampus UNDIP Tembalang, Semarang, Indonesia 50275

Abstract

Reuse of wastewater in the industry is mostly accomplished for watering plants. In a closed cycle, however, industrial wastewater can be returned through treatment to save water usage. This study aims to analyze textile wastewater's ability to be used as scrubbing liquid in the SO₂ gas and particulate removal from coal combustion using a packed wet scrubber. Usually, the textile industry uses boiler fueled by coal and discharging base/alkaline wastewater. The method is carried out experimentally using a prototype device using a combination of cyclone and scrubber, with a source of coal combustion gas emissions. We did experiments using textile wastewater 4 times and 2 times using clean water as a control. We monitor the SO₂, particulate emission in the gas stream, and pH, sulfate levels, and TSS levels in collected wastewater according to SNl. SO₂ gas and particulates from coal combustion will be absorbed by the scrubber's wastewater spray so that SO₂ will dissolve into sulfate, particulate matter into TSS. The study results using textile wastewater showed the removal efficiency of particulates on cyclone by 34-78%. The removal efficiency of SO₂ on wet scrubber was only 24.7%. There was an increase in TSS levels after passing through the scrubber by 46%. The rise in TSS and sulfate concentrations in the wastewater indicates the absorption of SO₂ and particulates into wastewater. Based on this result, we can use textile wastewater for controlling emission of SO₂ and particulate from coal combustion by feeding it for scrubber. However, the efficiency of this process is not optimal.

Keywords: air pollution, coal, control, emission, efficiency, industry

1. Introduction

Coal is widely used as a fuel for industrial processes such as boilers, "power plants," and other uses. Industry in Indonesia uses coal. In addition to its relatively low price compared to other fossil fuels, Indonesia's coal reserves are quite large. Combustion coal emissions, for example, emitting a lot of hazardous trace metal elements (Nalbandian, 2012).

When the process consists of coal combustion, significant amount of sulfur will be released leading to air pollution and ultimately polluting water and soil. Emissions from uncontrolled coal-fired power plants indicate that sulfur oxide and PM, which enter the water, are twice as high as emissions from vehicles and factories every year. Moreover to SO₂, other SO_x, like sulfate (SO₃²⁻), which contains fine particles, pollutes the air and water by traveling hundreds of miles from the power plant and producing sulfuric acid (H₂SO₄), a major constituent of acid rain. Dust was emitted

annually to contribute to PM's formation and, therefore, underlying risks to life expectancy (Munawar, 2018).

One effort to remove SO₂ and particulates is to use a wet scrubber. Pollutants that can be applied to wet scrubbers include organic vapors, vapors, gases (such as chromic acid, hydrogen sulfide, ammonia, chloride, fluoride, and SO₂), particulates, volatile organic compound, and hazardous air pollutants in the form of particulates (PMHAP). In general, wet scrubbers remove particulate through the impaction, inertia, and Brownian diffusion methods. Absorption is the process by which the dissolved component of a mixture of gases dissolves in a liquid (Richards, 2000).

On contrary, clean water has become an environmental crisis where clean water availability is inversely proportional to community demand. Mirror to the scenario of world economic growth, global industrial consumption of water increased 1.8 times more, from 800 billion m³ in 2009 to 1,500 billion m³ in 2015. So far, the textile industry is the largest consumer of clean water in the world with liquid waste, which contains various dangerous constituents if not appropriately

* Penulis Korespondensi.

E-mail: haryono.setiyo.huboyo@ft.undip.ac.id

handled (Buscio and Álvarez, 2019). Water consumption in the textile industry is 80-100 m³ for every ton of textile product produced, and liquid waste is discharged as much as 115-175 kg COD/ton of product, coupled with organic chemicals that are difficult to measure, color and salinity (Rosi *et al.*, 2007)

Water conservation is possible by the industry in addition to its high water consumption. For example, Hansen *et al.*, 2016 reuse wastewater for cooling tower make-up water in the Petrochemical industry. The textile industry must consider water conservation for several reasons, the main one being the increasing need for clean water from various other sectors, such as the availability of clean water decreases (Shaikh, 2009). Through their research, de Aquim, Hansen, & Gutierrez (2019) revealed the reuse of liquid waste. Liquid waste is one of the rational steps in preserving the environment, saving the cost of clean water consumption, and saving water treatment costs. Many advanced processes are needed for treating the textile wastewater for reuse due to the complexity of wastewater quality (Erdumlu *et al.*, 2012; Yin *et al.*, 2019). However, the characteristics of the reused waste will determine the successfulness of wastewater reuse in industry (Feng, Wang, & Chen, 2006). Therefore, liquid textile waste tends to have a high pH and reasonable as a scrubbing liquid to remove acidic gaseous pollutants from coal combustion emissions.

This research objective is to analyze the potential reuse of the textile industry's alkaline wastewater to be utilized as water feeding for the scrubber process. We will analyze particulate and SO₂ removal efficiency by measuring flue gas parameters and in wastewater (from the scrubber process). Through this process, it is hoped that there will be added value in saving water use due to using wastewater instead of clean water. It is also expected that the scrubber process for acidic gases neutralizing by alkaline textile wastewater, can be optimized.

2. Research Methods

The study was conducted with a laboratory-scale experimental method described in the schematic of the research device (Figure 1) or in the actual experimental prototype (Figure 2) from A (furnace), C (cyclone), F (scrubber) sequentially as an air pollutant control instrument.

The prototype comprise of an integrated furnace with cyclone and packed column scrubber (loaded with marbles about one third). Coal combustion is performed in the furnace, coal mass is equalized in each experiment to obtain homogeneous emissions. The scrubber flow system is countercurrent, where gas flows from below, while liquid flows from above. In this experiment, the dependent variables are combustion

temperatures, emission concentration of SO₂ and particulate, concentration (in the liquid) of pH, sulfate, and TSS. While the independent variable is the L/G value. Coal mass for burning, scrubber bed height denotes for static variable.

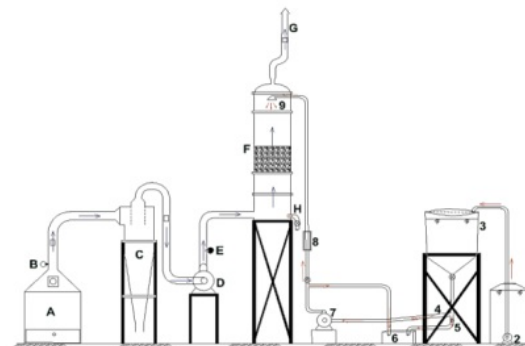


Figure 1. Experimental Diagram



Figure 2. Experimental Prototype

Then particulate and SO₂ samples are taken at 3 sampling points, namely, the inlet point (before cyclone), cyclone point (after the cyclone, before scrubber), and the outlet point (after scrubber). Due to device constraints, the measurement at the scrubber

outlet is only for SO₂ measurements. The SO₂ emission measurements are carried out with a portable gas analyzer (Bacharach PCA3). Particulate sampling was done iso-kinetically according to SNI 7117.17-2009.

Experiments were accomplished by varying the scrubbing liquid used, namely with textile wastewater and clean water. Experiments using liquid textile waste were done 4 times, and clean water experiments were conducted 2 times. The use of pure water as scrubber feeding is only for comparison with wastewater feeding. Textile liquid wastewater was kept for 12 hours to reduce TSS levels before being used as scrubbing liquid during the experiments. Then the wastewater was pumped into the wet scrubber using a pump at 5 LPM. The cyclone flow rate was set at 240 m³/hour. The L/G value was measured at the scrubber outlet, the real gas stream rate going through the scrubber. Scrubbing samples are taken before and after passing the wet scrubber. Then during the experiment, scrubbing liquid samples were measured for pH, sulfate levels, and TSS levels according to the methods in SNI 06-6989.20-2004 and SNI 06-6989.3-2004.

To get the removal efficiency, the following Formula 1.

$$\eta = \frac{Q_0 c_0 - Q_1 c_1}{Q_0 c_0} = 1 - \frac{Q_1 c_1}{Q_0 c_0} \quad (1)$$

where Q₀ is inlet flowrate (m³/seconds), Q₁ is outlet flowrate (m³/seconds), C₀ is inlet concentration (g/m³), C₁ is outlet concentration (g/m³).

3. Result and Discussion

3.1. L/G ratio

For knowing ratio of liquid to gas (L/G) we measure carefully the gas flowrate at the emission as well at the furnace outlet and we compare it with

measurement of liquid flowrate at the scrubber inlet. Varying liquid flowrate is possible while varying gas flowrate is impossible due to static flow of cyclone draft fan.

The outcome of the real L/G calculations are depicted in Table 1. The real L/G calculations results are bigger than the theoretical used L/G calculations for this research. Large L/G means having high liquid flowrate and tiny flow rate of gas.

Based on Table 1, it shows that the real L/G is obtained when measuring liquid and gas flowrate L/ G did not meet the EPA standards (2002) for acid gas that has around 2-20 gpm/1000 cfm. According to Richards (2000), the typical L/G ratio design for gas emission removal is higher than in particulates, which is 5-50 gallons/1000 ACF. Hence the calculated of real L/G in this research meets the typical design, according to Richards (2000).

3.2. Characteristics of Textile Wastewater

We tested the wastewater characteristics before it is being used. Based on Table 2, Textile wastewater has a high pH value as expected to remove acidic gases such as SO₂. It also had high COD, color, and TSS. These results are consistent with typical textile wastewater, namely high BOD, COD, SS, pH, and color (Yaseen and Scholz 2016). Other researchers have also identified high levels of metals (Sharma *et al.*, 2007) and temperature (Dos Santos *et al.*, 2007).

3.3. pH scrubbing liquid

Data for measuring the wastewater pH were shown in Figure 2. In tests 1 to 5, generally, the wastewater's pH decreased after being utilized as a scrubbing liquid. This shows that acidic SO₂ gas is able to lower the pH of wastewater that is alkaline even though it is not significant. In testing 4 and 5 the pH of the wastewater has increased. And in test 6, the pH showed somewhat stable.

Table 1. Ratio L/G during actual experiments

Testing	Liquid Flow Rate (gpm)	Outlet Volumetric Flow Rate (cfm)	L / 1000 cfm
1	1,321	51,776	25,511
2	1,321	51,443	25,676
3	1,321	52,775	25,028
4	1,321	52,609	25,107
5	1,321	69,590	18,981
6	1,321	70,422	18,756
7	1,321	51,443	25,676
8	1,321	52,109	25,348

Table 2. Characteristics of Textile Wastewater

Parameter	Unit	Results	Standard by PERMENLH RI No.5/2014
COD	mg / L	526.67	150
Color	pt-co	4844.3	
TSS	mg / L	1480	50
pH	-	11.87	6.0-9.0

The difference in pH values before and after the wet scrubber is most likely rooted by the effective contact of gaseous emission with scrubbed liquid. In this study, contact of gaseous emission with scrubbed liquid is a countercurrent method. However, the liquid spray was not so small enough to make intimate contact between the gaseous pollutant and scrubbed liquid.

Theoretically, it is hard to calculate the pH of the final alkaline scrubbing solution after having contact with SO₂ gas, considering impurities in both emissions and wastewater. However, based on the study by Sharma *et al.* (2010), which stated that the pH values of NaOH solution can reach as low as 4.75 after coming into contact for 75 min with SO₂ gas from coal burning in the power plant.

3.4. Combustion Temperature

The combustion temperature somewhat influences the SO₂ emission concentration. Meanwhile, the scrubber outlet temperature indicates the contact of the liquid scrubber with gas emissions. Therefore, temperature measurements were conducted at the inlet or the furnace and the outlet or wet scrubber. The results of combustion and wet scrubber outlet temperature can be seen in Figure 3. There was a drastic temperature drop at the furnace outlet with the scrubber outlet. The temperature drop occurs along with the flow from the furnace to the scrubber. However, the largest decrease is predicted to occur between the scrubber inlet and outlet. Theoretically, the higher the gas temperature, the lower the absorption rate, and vice versa. The lower the gas temperature, the higher the absorption rate will be. High-temperature gas can also cause the solution to decrease because it evaporates. If the outlet of the gas flow temperature increase, it is an indication of a change in operation. It could be originated by increasing outlet process temperature, increasing the gas flowrate, or decreasing the liquid flowrate (EPA, 2005). With different gases, according to Abdurrahman *et al.*, 2018, the decreasing temperature in scrubbers will increase the absorption rate of H₂S gas almost linearly. Thus, in this study, dropping temperature significantly due to intimate

contact between scrubbed liquid (wastewater) with gaseous emission from a furnace.

3.5. Analysis of Removal for Particulates on Cyclone

By installing cyclone, performance of particulate removal in reactor is supposed to be better. Therefore, cyclone removal efficiency needs to be identified to study its relation to efficiency of particulate removal in wet scrubbers. The particulate removal efficiency on the cyclone is summarized in Figure 4.

In this research, a conventional cyclone is used theoretically to remove particles with sizes greater than 5 µm. Finer particles are difficult to separate through a centrifugal mechanism because centrifugal force will push the finer particle to move outside cyclone. (Huang *et al.*, 2018; Kim *et al.*, 1990). Therefore, the cyclone's removal efficiency in this experiment is removing coarse particulate matter from the flue gas, thus producing flue gas which still carries fine particulates. Figure 4 shows the fluctuating particulate removal efficiency in cyclones.

Experiment 1 - 4 depicts the cyclone eliminates particulate with varying efficiency. Experiments using wastewater as a scrubbing liquid (experiments 1 - 4) particulate removal efficiency ranged from 34 % to 78%. The highest efficiency occurred in experiment 4, the lowest particulate removal efficiency occurred in experiment 1. The difference in removal efficiency was caused by mass loading entering the cyclone due to fluctuating combustion results at the furnace. In test number 6, there was an error in the combustion process, thus not shown in this graph.

Table 3 shows the amount of gas emission entering the cyclone with the cyclone's efficiency in each experiment. Experiment 4, which has the highest efficiency, also has the highest mass loading among other experiments. While in experiment 1, which had the lowest efficiency among experiments with wastewater, it had a loading mass of 1.4 m³/minute. This is comparable to what was revealed by Huang *et al.* (2018) that a rising in loading mass will increase cyclone removal efficiency for velocity of inlet gas less than 15 m/sec.

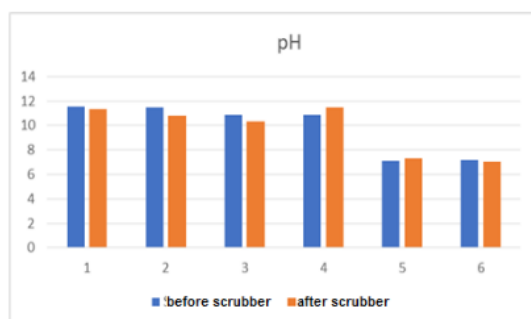


Figure 2. Liquid Scrubbing pH Before-After Scrubber

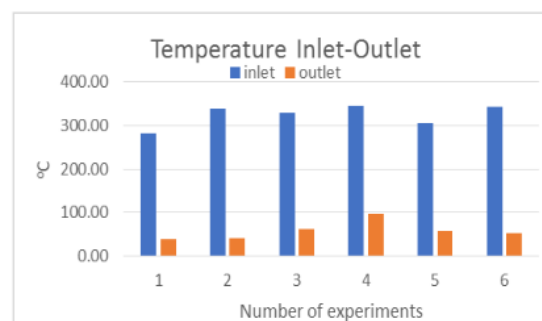


Figure 3. Scrubber Temperature Measurement Results

Besides loading mass, other parameter affecting cyclone removal efficiency are inlet velocity (Ray *et al.*, 1998). According to Byatt-Smith *et al.* (1996), the velocity of the flue gas has to be high enough to push the particle out of the path until the flue gas exits the outlet. In general, if the inlet velocity increases, so efficiency will also increase. Through their experiment, Wei, Sun, and Yang (2019) explained that the low velocity of inlet gas will cause low kinetic energy. The centrifugal force acts on relatively low particles so that it is hard to be released from its path. Suppose the inlet gas's velocity is relatively high, the radial displacement (i.e. the displacement of particles from the radial path) will be higher than the downward-directed gas velocity. In study trial with clean water, low efficiency was obtained in experiment 5 (Table 3). The cyclone's low efficiency might be originated by improper placement of the particle measuring device after the cyclone.

3.6. SO₂ Removal Efficiency

The measurement results of SO₂ gas emission concentrations using scrubbing liquid wastewater are highlighted in Table 4. While the measurement results of SO₂ gas emission concentrations using clean water

scrubbing liquid are explained in Table 5. Likewise, the emission load for particulates, emission load for SO₂ gas is also fluctuating. The experiment's efficiency by scrubbing textile waste is lower than using clean water, possibly because the contact of SO₂ gas and clean water occurs more intensively. The presence of TSS in textile wastewater makes water spray not optimal.

Based on previous research using artificial waste (Huboyo *et al.*, 2019), on average, removal efficiency of SO₂ gas reached 36.5%. Also, compared with the same device but no cyclone installed, the removal efficiency of SO₂ is around 31-78% (Huboyo *et al.*, 2000). So this research outcome showed smaller than using artificial wastewater and no cyclone installed. As shown in Figure 6, clean water is 3 times better at removing SO₂ gas. The unstable gas emission input loading during the measurement causes the efficiency results to fluctuate significantly. Of course, this efficiency figure is below from the expectations of the scrubber performance. Improvements to the wastewater spray system are indispensable to improve scrubber performance.

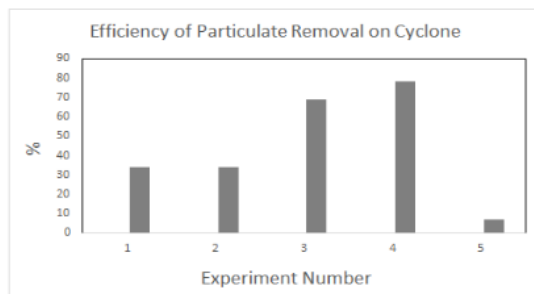


Figure 4. Graph of Particulate Removal Efficiency on Cyclone

Table 3. Mass Loading, Inlet Velocity and Cyclone Efficiency

Feeding	Trial	Inlet	Mass	Cyclone
Textile wastewater	1	3.7	1.43	34
	2	3.7	1.31	34
	3	5.2	2.62	69
	4	5.2	2.65	78
Clean water	5	5.7	1.65	7
	6	5.6	1.64	*

* error results

Table 4. SO₂ Removal Efficiency With Wastewater Liquid Scrubbing

Experiment Number	SO ₂ Concentration (mg/m ³)		volumetric flow rate (m ³ /sec)		Emission load (mg/sec)		efficiency (%)	average efficiency (%)
	inlet	outlet	inlet	outlet	inlet	outlet		
1	49.13	58.30	0.0291	0.0243	1.43	1.42	0.90	24.70
2	36.03	31.44	0.0293	0.0248	1.06	0.78	26.06	
3	14.41	11.14	0.0409	0.0328	0.59	0.37	38.00	
4	14.41	11.79	0.0411	0.0332	0.59	0.39	33.83	

Table 5. SO₂ Removal Efficiency With Clean Water Liquid Scrubbing

Experiment Number	SO ₂ Concentration (mg/m ³)		volumetric flow rate (m ³ /sec)		Emission load (mg/sec)		efficiency (%)	average efficiency (%)
	inlet	outlet	inlet	outlet	inlet	outlet		
5	27.08	20.09	0.0450	0.0243	1.22	0.49	59.99	60.62
6	40.18	27.95	0.0442	0.0246	1.77	0.69	61.26	

3.7. SO₄ and TSS Concentration in Wastewater

To determine SO₂ absorption in wastewater, sulfate (SO₄) testing is performed. Sulfate testing refers to SNI 06-6989.2004 about the sulfate test method. The results of sulfate testing in wastewater are shown in Figure 7. Figure 7 shows the addition of sulfate levels of wastewater at the inlet or before use on wet scrubbers and outlets or after the wet scrubber. The addition of the sulfate content showed that the absorption of SO₂ in the wastewater. In the 5th test (not shown), sulfate levels decreased because there was no effective absorption of SO₂. A decrease in sulfate levels may be possible because fly ash attached to marbles can become absorbent and reduce levels of SO₂. According to Lee (1990), coal fly ash can act like absorbent in SO₂ removal. SO₂ is absorbed in sulfite and sulfate form.

Figure 8 shows TSS testing results in trial with variations in liquid waste as a wet scrubber feed. Generally, the results indicated are TSS levels have increased from before to after being used as feed liquid. This increase demonstrates that the liquid feed in the wet scrubber can remove particulates from the flue gas, so the TSS levels after being used are higher than before except for the second experiment. The TSS level went up by 46% after the liquid get through the scrubber (beyond experiment 2).

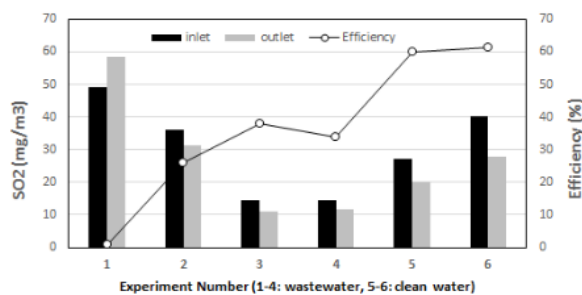


Figure 6. SO₂ Concentration and Removal Efficiency

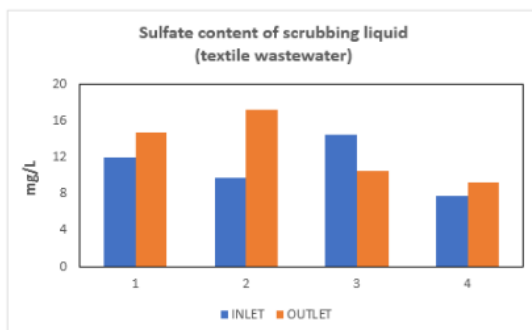


Figure 7. Sulfate Test Results in Wastewater

As showed in Figure 9, the increase of TSS concentrations during the experiment with clean water feeding showed a drastic increase with an average of 225%. Research trial with clean water, a lot of particulate matter in flue gas is absorbed in the scrubber.

The efficiency for pollutant removal with wastewater is much lower than that of clean water. For sustainable waste treatment, industrial wastewater reuse as scrubber feed water needs to be continuously studied to achieve the desired efficiency. It is hoped that the industry will use water resources efficiently. Ultimately, water sources could be allocated for basic human needs.

4. Conclusion

The study results demonstrated that the efficiency of removing particulate matter through scrubbing wastewater feeding was on average 24.7% lower than that of clean water, which reached 60%. The increase in TSS and sulfate concentrations in the wastewater indicates the absorption of SO₂ and particulates into wastewater. Research shows the probable to use industrial wastewater as a feeding scrubber to reduce water use for scrubber feeding. Fluctuations in the mass loading rate of combustion will also produce fluctuations in combustion emissions.

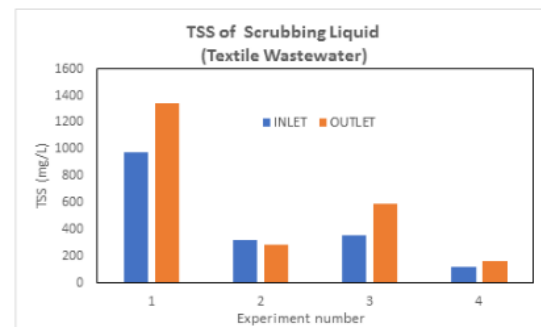


Figure 8. TSS Content of Scrubbing Liquid

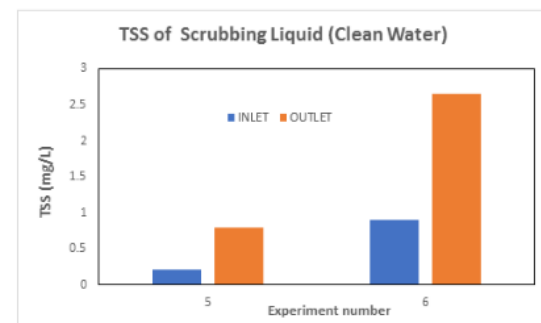


Figure 9. The concentration of TSS of Clean Water Scrubbing Liquid

Acknowledgement

This study was supported by the Directorate General of Research and Development Reinforcement, Ministry of Research, Technology and Higher Education, Republic of Indonesia (Grant Number.: 101-176/UN7.P4.3/PP/2019).

References

- Abdurrahman, A., Kurniawan, D., Adhim, M.M.(2018). The Effect of Temperature Variation on Water Scrubber System to Optimize Biogas Purification. *E3S Web of Conferences* 42:01006
- Buscio, V., López-Grimau, V., Álvarez, M. D., & Gutiérrez-Bouzán, C. (2019). Reducing the environmental impact of textile industry by reusing residual salts and water: ECUVal system. *Chemical Engineering Journal*, 373(March), 161–170.
- Byatt-Smith, J., Day, R., Harlen, O., Howison, S. D., Lister, J., Smith, S. L., & Stone, R. (1996). *Minimum Particle Size for Cyclone Dust Separator*. 1–6.
- de Aquim, P. M., Hansen, É., & Gutterres, M. (2019). Water reuse: An alternative to minimize the environmental impact on the leather industry. *Journal of Environmental Management*, 230, 456–463.
- Dos Santos, A.B., Cervantes, F.J., van Lier, J.B. (2007) Review paper on current technologies for decolourisation of textile wastewaters: perspectives for anaerobic biotechnology. *Bioresour Technology*, 98, 2369–2385
- Environmental Protection Agency. (2005). *APPENDIX B CAM ILLUSTRATIONS*. <https://www.epa.gov/sites/production/files/2016-05/documents/draftcamappb.pdf>, accessed at November 2nd, 2020.
- Erdumlu, N., Ozipek, B., Yilmaz, G., Topatan, Z. (2012). Reuse of Effluent Water Obtained In Different Textile Finishing Processes. *Autex Research Journal*, 12(1), 23 - 28
- Feng, X., Wang, N., & Chen, E. (2006). Water system integration in a catalyst plant. *Chemical Engineering Research and Design*, 84(8A), 645–651.
- Hansen, E., Rodrigues, M.A.S., de Aquim, P.M. (2016). Wastewater reuse in a cascade based system of a petrochemical industry for the replacement of losses in cooling towers. *Journal of Environmental Management*, 181, 157-162
- Huang, A. N., Ito, K., Fukasawa, T., Fukui, K., & Kuo, H. P. (2018). Effects of particle mass loading on the hydrodynamics and separation efficiency of a cyclone separator. *Journal of the Taiwan Institute of Chemical Engineers*, 90, 61–67.
- Huboyo, H.S., Sudamo (2019). The use of artificial wastewater for water feeding of scrubber for treating coal burning emission. *IOP Conf. Ser.: Earth Environ. Sci.* 361 012019
- Huboyo, H.S., Sudarno, Prassanty L.N (2020). Wet Scrubber for Coal Combustion with The Use of Textile Wastewater Feeding. *IOP Conf. Series: Earth and Environmental Science*. 506 (2020) 012012
- Richards, J.R (2000). *Control of gaseous emissions: student manual*. ICES Ltd. The Multimedia Group, Raleigh North Carolina, USA.
- Kim, J. C., & Lee, K. W. (1990). Experimental study of particle collection by small cyclones. *Aerosol Science and Technology*, 12(4), 1003–1015.
- Munawar, M. E. (2018). Human health and environmental impacts of coal combustion and post-combustion wastes. *Journal of Sustainable Mining*, 17(2), 87–96.
- Ray, M. B., Luning, P. E., Hoffmann, A. C., Plomp, A., & Beumer, M. I. L. (1998). Improving the removal efficiency of industrial-scale cyclones for particles smaller than five micrometre. *International Journal of Mineral Processing*, 53(1–2), 39–47.
- Rosi, O.L, Casarci, M, Mattioli, D, Florio L.D. (2007). Best available technique for water reuse in textile SMEs (Battle Life Project) *Desalination* 206(1-3), 614-619.
- Shaikh, M. A. (2009). Water conservation in textile industry. *Pakistan Textile Journal*, 58(11), 48–51.
- Sharma, K.P., Sharma, S., Sharma S, Singh, P.K., Kumar, S., Grover, R., Sharma PK. (2007) A comparative study on characterization of textile wastewaters (untreated and treated) toxicity by chemical and biological tests. *Chemosphere* 69, 48–54.
- Sharma, R., Acharya, S., Sharma, A.K.(2010). Effect of absorption of sulphur dioxide in sodium hydroxide solution to protect environment : a case study at shree power, Beawar, Rajasthan. *International Journal of Chemical Science* 8(2), 1021-1032
- Nalbandian, H. (2012). Trace element emissions from coal. In International Energy Agency Clean Coal Centre. ISBN 978-92-9029-523-5.
- Wei, Q., Sun, G., & Yang, J. (2019). A model for prediction of maximum-efficiency inlet velocity in a gas-solid cyclone separator. *Chemical Engineering Science*, 204, 287–297.
- Yaseen, D.A., Scholz, M. (2016) Shallow pond systems planted with Lemna minor treating azo dyes. *Ecological Engineering*. 94:295–305
- Yin, H., Qiu, P., Qian, Y., Kong, Z., Zheng, X., Tang,

Z., Guo, H. (2019). Textile Wastewater Treatment for Water Reuse: A Case Study. *Processes* 7(34), 2 - 21

Analysis of Removing Particulates and SO₂ from Coal Combustion Emissions Using Cyclone and Wet Scrubber With Textile Wastewater Feed

ORIGINALITY REPORT

7%

SIMILARITY INDEX

4%

INTERNET SOURCES

3%

PUBLICATIONS

5%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

3%

★ Submitted to Universitas Diponegoro

Student Paper

Exclude quotes On

Exclude bibliography On

Exclude matches < 10 words