

# Fast decomposition of food waste to produce mature and stable compost

*by Ika Bagus Priyambada*

---

**Submission date:** 27-Feb-2023 05:19PM (UTC+0700)

**Submission ID:** 2024200365

**File name:** 3.pdf (700.43K)

**Word count:** 5512

**Character count:** 28040



Sustinere

Journal of Environment and Sustainability

Volume 2 Issue 3 (2018) 156-167

Print ISSN: 2549-1245 Online ISSN: 2549-1253

Website: <https://sustinerejes.com> E-mail: [sustinere.jes@iain-surakarta.ac.id](mailto:sustinere.jes@iain-surakarta.ac.id)

## RESEARCH PAPER

# Fast decomposition of food waste to produce mature and stable compost

Ika Bagus Priyambada\*, Irawan Wisnu Wardana

*Dept. of Environmental Engineering, Faculty of Engineering, Diponegoro University, Indonesia*

### Article history:

Received 11 November 2018 | Accepted 29 December 2018 | Available online 31 December 2018

**Abstract.** Food waste can be meat, fish, cooked food scraps, moldy bread, bone scraps, cakes, expired foods, dairy products, fruits and vegetables. Food waste which is put into the trash will decay and produce a foul odor which in turn will invite flies and cause potentially diseases. Most of the food waste that is processed using the composting process needs to spend a relatively long time, which is about 1-3 months or even 6-12 months. This study aims to accelerate composting time through the addition of additive microorganisms in various quantities. Four aerobic composter reactors were utilized in this study. Variations of additive microorganisms added to the research object were 0 in reactor (control), 8 g in B2 reactor, 16 g in B3 reactor, and 32 g in B4 reactor. All reactors were added with dolomite lime. During the composting process temperature, pH, water content and macroelement were tested. The results showed that the mature and stable compost was reached on the seventh day and produced from B2 reactor. In That reactor treated food waste and additive microorganisms with a ratio of 7:3, and 1 g dolomite lime. The level of C/N ratio produced from B2 reactor was 16.71. The value of C/N ratio was better than B3 reactor which produced C/N of 18.37. The control reactor produced a C/N ratio of 21.84 and mature and stable compost was reached on the 14th day. All in all, this study was regarded to be successful in accelerating the degradation of food waste into mature and stable compost in just seven days.

**Keywords:** fast biodegradation; food waste; decomposition; compost stability, compost maturity

## 1. Introduction

According to Law Number 18 of 2008, waste is the rest material used in human daily activities and/or natural processes that are in solid form. Food waste consists of leftovers from meat and vegetables originating from the process of making, storing, selling, preparing, cooking, and serving the food (Tchobanoglous & Kreith, 2002). Waste is a source of a problem that has often been faced by both developed and developing countries and until now the strategy of handling is still being developed. Food waste can be in the form of meat, fish, cooked food scraps, moldy bread, bone scraps, cakes, expired food, milk products, fruit and vegetables. When the

\*Corresponding author. E-mail: [ikabaguspriyambada@gmail.com](mailto:ikabaguspriyambada@gmail.com)  
DOI 10.22515/sustinerejes.v2i3.47

2 food waste is put into the trash, it will decay and produce a foul odor which in turn will invite flies. The amount of food waste generated from household activities is relatively high which is more than 60% and the other is a recyclable waste, such as plastic, paper, glass, and metal. Food waste cannot be recycled or sorted because it contains very high water content up to 74.5%. This waste has the potential to produce pollutants in the form of leachate, odor and air pollution (Zhang et al., 2008). The process of decaying food waste will produce a slurry which prevents air flow so that the waste quickly turns into anaerobic. The anaerobic process releases stinking odors caused by H<sub>2</sub>S gas, NH<sub>3</sub> and other volatile compounds. In the decay process, the food waste structure/fiber is weakened and the water will be released into leachate (Zhang et al., 2008).

1 Most food waste is synthesized through a composting process. However, it will take a relatively long time, which is around 1-3 months or even 6-12 months. To maximize composting, it is necessary to ensure that the degradation process of organic matter takes place effectively and efficiently (Fan et al., 2017). Justice et al. (2010) states that fundamental knowledge of the composting process is very important to ensure the sustainability of composting. This requires setting clear parameters during composting such as ripening time, comparison of bulking agent and waste, aeration, the emergence of leachate, and strong odor. In addition, the development of microbes and the emergence of high temperatures can be act as an indicator of the composting process speed. Controlling the composting process parameters will leading it to be more efficient, produce low gas emissions, and produce quality compost (Barrena et al., 2014).

The process of decomposition of solid waste can be accelerated by regulating the particle size (Bernal et al., 2009). The distribution and size of particles of solid waste affect the growth area of decomposing microorganisms and maintain sufficient porosity for the aeration process. The large size of the particles of solid waste makes the microorganisms unable to reach the middle of solid waste which leads to the slow decomposition. Food waste needs to be enumerated first so that the particle size becomes smaller and homogeneous.

Composting can take place faster with the help of microorganisms. Microorganisms have an important role in the process of decomposition of food waste. Various types of microorganisms collectively decompose food waste. Microorganisms involved in composting will grow according to temperature, which signifies various steps in the decomposition process (Keener et al., 2000). The process of decomposition of food waste needs to get assistance from microorganisms outside the medium (additive microorganism). Some previous research shows that mature and stable compost can be used as a source of microorganisms to accelerate the decomposition process. The composition of raw materials is 40% manure and 60% leaf waste (Azizah et al., 2017).

Based on this background, a clearer understanding of the number of additive microorganisms that must be added is very important so that the compost maturation can run faster. This study analyzes the fast composting process (fast biodegradation) in detail. The hypothesis of this research is that the process of composting food waste can take place within a 1-2 week period. The indicators of compost quality include the level of stability, maturity, and speed of degradation of food waste.


## 2. Literature review

### 2.1 Food waste

According to Tchobanoglous & Kreith (2002), food waste consists of remaining food that is not eaten and waste when making food from households, commercial businesses (restaurants), institutions (schools, colleges and hospitals), and some industrial sources (lunch at the company). Food waste is the animal and vegetable waste resulted from making, storing, selling, preparing, cooking, and serving food. The density value for food waste is 1 pound/m<sup>3</sup> or 0.453 kg/m<sup>3</sup>. The moisture content of food waste is 50-80%.

### 2.2 Composting

Compost is the result of decomposition of organic matter through biological processes with the assistance of decomposers. The decomposition process can be aerobically or anaerobically (Tchobanoglous & Kreith, 2002). The advantage of compost is that it has the complete macro and micronutrient content. Macronutrients contained in compost include N, P, K, Ca, Mg, and S, while the micronutrients content include Fe, Mn, Zn, Cl, Cu, Mo, Na and B (Pereira et al., 2012). The aerobic composting process does not require too long duration and does not produce odor, because of the presence of aerobic bacteria. The microbiological decomposition process is characterized by the loss of mass and volume of organic material. The results of the aerobic composting process are dry ingredients with less than 50% moisture, dark brown, and crumbs. Aerobic microbes take oxygen and water from the air. The food is obtained from organic materials which will be converted into metabolic products in the form of carbon dioxide (CO<sub>2</sub>), water (H<sub>2</sub>O), humus, and energy. Some of the energy produced is used by microbes for growth and reproduction, and some will be released into the environment as heat. Simanungkalit et al. (2006) formulated the reaction of the aerobic composting process is as follows:



14

**Table 1** The comparison between aerobic and anaerobic composting

Characteristics	Aerobic process	Anaerobic process
Formation reaction	Exothermic requires energy from the outside, produced by heat	Endodermis does not need energy from outside, produced by bio-energy sources
The final product	Humic, CO <sub>2</sub> , H <sub>2</sub> O	Mud, CO <sub>2</sub> , H <sub>2</sub> O
Volume reduction	More than 50%	More than 50%
Processing Time	(20-30) days	(20-40) days
The main purpose	Volume reduction	Energy production
Side goals	Compost production	Waste stabilization
Aesthetics	Does not cause odor	Smelly

### 2.3 Factors affecting the composting process

Tchobanoglous and Kreith (2002) stated that in general, the factors that most influence the composting process are the characteristics of the composted material, the selected bio-activator, and the composting method. The factors that influence the composting process are presented in more detailed as follows.

#### 2.3.1 The ratio of C/N

Charcoal or carbon (C) and nitrogen (N) are found in all parts of organic waste. In the composting process, C is an energy source for microbes while N functions as a food and nutrition source for microbes. The C/N ratio is determined based on the type of waste, but the most effective for the composting process ranges from 30:1 to 40:1. Microbes break down compound C as an energy source and use N for protein synthesis. At the C/N ratio between 30 and 40, microbes get enough C for energy and N for protein synthesis. If the C/N ratio is too high, microbes lack N for protein synthesis so that decomposition will require a longer duration.

#### 2.3.2 The size of the particles

Particle size greatly determines the amount of space between materials (porosity). A sufficient pore will allow air and water to be spread more evenly in the stack. To increase the surface area, the particle size of the material should be reduced to be 2 -10 cm for a better result. Large particles will inhibit aeration and microbial performance so that the ripening process will take longer. In addition, the increasing contact between microbes and materials can accelerate the decomposition process (Tchobanoglous & Kreith, 2002).

#### 2.3.3 Aeration

Fast composting can occur when there is sufficient oxygen. Aeration naturally occurs when there is an increase in the temperature which will cause the warm air to come out while cooler air to enter the compost pile. Aeration is determined by porosity, material particle size and material water content (humidity). If aeration is hampered, the comparison of carbon and nitrogen in various organic ingredients can result in an anaerobic process that will produce strong-smelling ammonia. Aeration can be increased by reversing or flowing air into the compost pile.

#### 2.3.4 Temperature

Heat is generated from microbial activity. The higher the temperature is, the more oxygen consumption and the faster the decomposition process is. The high amount of oxygen consumed in the microbial metabolism will produce more CO<sub>2</sub> so that organic matter decomposes faster. An increase in temperature can occur quickly in the compost pile. Temperatures ranging from 30°C -60°C show fast composting activities. While temperatures higher than 60°C will kill some microbes and only thermophilic microbes will survive. High temperatures will also kill plant pathogenic microbes and weed seeds. When the temperature reaches 60°C, we should immediately do a pile reversal or air distribution to reduce the temperature, because the thermophilic microbes will be easily killed.

#### 2.3.5 pH Level

The composting process can occur at a pH range of 5.5 - 9. The composting process will cause changes in organic matter and the pH of the material itself. For example, the process of temporary or local acid release will cause a decrease in pH (acidification), while the production of ammonia from nitrogen-containing compounds will increase pH in the initial phases of composting. Mature compost pH levels are usually close to neutral. The condition of compost contaminated with rainwater can also cause increase the pH level.



### 3. Methodology

#### 3.1 Research instrument

The main equipment of this experiment is four pieces of reactors. They are tubular reactors with a height of 30 cm and a diameter of 23 cm. They are made of plastic with an additional blower on the right side which is connected to a 2.5 inch diameter pipe. While on the other side there is a small pipe where leachate will flow once it is formed. At the top of the reactor is a hollow hole for circulating the air inside the reactor. A blower is driven using DC electricity. It can be turned off and turned on. The reactor scheme is shown in Figure 1.

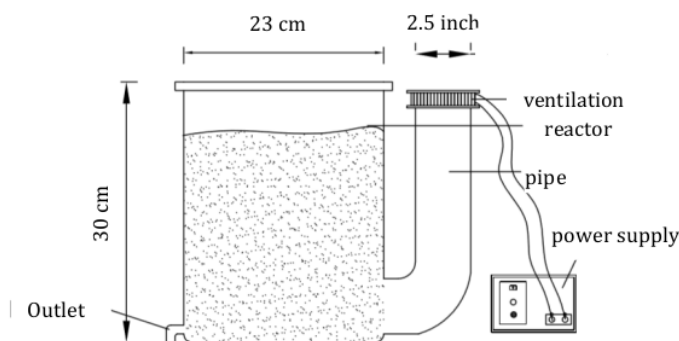


Figure 1. The reactor used in this study

#### 3.2 Food waste sources and research sites

The research location is divided into two places. The first location is the site to get samples which is, in this case, the canteen of Electrical Engineering campus situated around 07°03'01.19"LS and 110°26'23.01 "BT. While the second location is where the test and sample analysis were conducted. It is located in the Environmental Engineering laboratory located around 07°03'01.93 "LS and 110°26'25.09" BT.

#### 3.3 Research variables

Three variables observed in this study included independent, dependent, and control variables. The independent variables in this study are the various amount of additive microorganism involved. While the dependent variable is the homogenous compost parameters including water content, temperature, and C/N ratio

#### 3.4 Research steps

Food waste is collected before it is put into the reactor with a mass of 4 kg in each. Four reactors and one grinding tool were applied in this study. Variations in the comparison of the amount of food waste and mature compost are presented in Table 1.

The initial characteristics of food waste used in the study were tested in the form of the C/N ratio. Food waste is smoothed using a grinder. Food waste and additive microorganisms are put into the reactor and the blower is turned on for aeration. pH and temperature were checked out every day and the sample was tested on days 0, 3 and 7 in the form of the C/N ratio. The temperature was measured using the expansion method (mercury thermometer), pH measurement (SNI 06-6989.11-2004) and organic C using UV-Vis spectrophotometer (Genesys

10s, Thermo Fisher Scientific). The wastewater content was measured by real-time using a water level measuring instrument series SM1701B and verified by the gravimetric method heated at 70°C for 48 hours.

**Table 2.** The composition and treatment of reactors

Reactor	Composition	Treatment
Control	Food waste: mature compost 7:3 + 1gr dolomite	Without environmental bio-activator
B1	Food waste: mature compost 7:3 + 1 gr dolomite	8 gram of additive microorganism
B2	Food waste: mature compost 7:3 + 1gr dolomite	16 gram of additive microorganism
B3	Food waste: mature compost 7:3 + 1gr dolomite	32 gram of additive microorganism

#### 4. Results and discussions

##### 4.1 The evaluation of the ratio between food waste and bioactivator

According to Azizah et al. (2017), the composting process is influenced by the characteristics of composted materials, bioactivators, and composting methods used. The characteristics of composted materials are shown in Table 2.

**Table 2.** The characteristics of composted material

Parameter	Compost	Food waste
C-Organic (%)	12.79	34.97
N-Total (%)	1.17	2.41
C/N Ratio	10.9	14.52
P-Total (%)	0.03	0.024
K-Total (%)	0.78	2.109
pH	7.4	3.6
Kadar Air (%)	17.42	78.94

Note: Compost was taken from Diponegoro University's Integrated Waste Management Site (Tempat Pembuangan Sampah Terintegrasi/TPST)

Compost quality indicators based on the C/N parameter, approaching the C/N ratio of land was 10-20. The results showed a ratio of 7:3 and the addition of 1 gram of dolomite lime resulted in a C/N ratio of 11.22 on the 21st day, while other ratios produced a greater C/N. The overall results of the C/N values for various variations are shown in Table 3.

**Table 3.** Various scores of C/N

Treatment	Ratio C/N
Food waste: mature compost(10:0)	29.14
Food waste : mature compost (9:1) + 1 gr dolomite	26.62
Food waste: mature compost (8:2) + 1 gr dolomite	15.76
Food waste: mature compost (7:3) +1 gr dolomite	11.22

A study conducted by Ariyanti (2018) used 50 gram compost bio-activator in every 10 kg of leaf waste. The compost riped and became stable within 14 days. In this study the weight of the mixing material for each reactor was 5 kg.

## 4.2 The evaluation of composting time

### 4.2.1 Temperature

The temperature became a parameter of exothermic reactions and important factors that influence the evaporation of water and the degradation of organic compounds (Zhang et al., 2008). The main control indicator on the activity of microorganisms during the process of degradation of organic matter is the temperature. If the optimum temperature of microorganisms is reached, the composting process will run optimally as well. According to Ayuningtyas (2009) the optimum temperature of the composting process ranges between 33-55 °C.

Temperature is observed to see the difference of composting speed based on variations of additive microorganism in each reactor. The research temperature data is displayed in degrees Celsius. The temperature of compost is measured by inserting a thermometer into as half of the compost height. The temperature of the compost was observed for 14 days using 14 measurements.

Based on Figure 2, it can be seen that the temperature in all reactors containing additive microorganism ranged from 26°C–57°C. On day 0, the reactor added with additive microorganism reached a temperature of 33°C while the control reactor reached 32°C. the temperature increased significantly from day one to day three and it peaked on day two in reactor B1 which was 57°C. This showed that on days one and three the temperatures peaked and microorganisms that worked was thermophilic microorganism. Thermophilic microorganisms live at 45°C-60°C and are responsible for consuming carbohydrates and proteins so that the compost material can be degraded quickly. These microorganisms include *Aspergillus niger* and thermophilic fungi. Some *Aspergillus niger* are able to remodel cellulose and hemicellulose so that decomposition begins to slow down and the highest temperatures are reached (Bernal et al., 2009). Sufficient oxygen supply will increase the activity of microorganisms so that it can accelerate the degradation process (Ayuningtyas, 2009). The addition of a bio-activator will make the microorganisms inside the compost more active which can be shown by an increase in temperature.

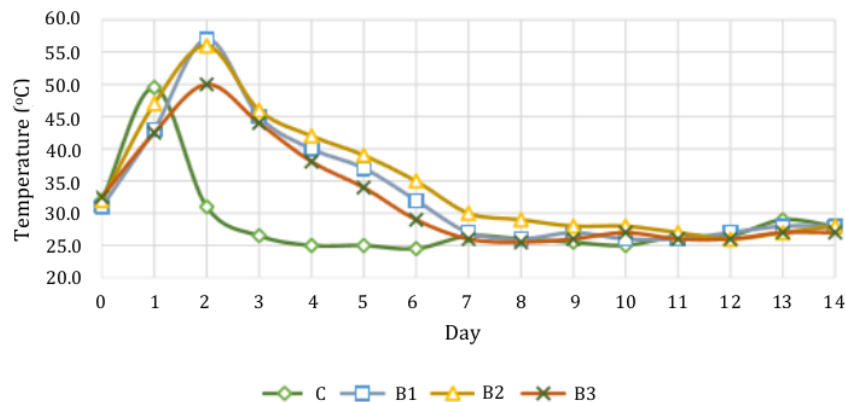


Figure 2. The graph of changes in compost temperature



After reaching the peak, the temperature of the composting process began to decrease on the 4th and 6th days. This was called as the mesophilic phase with temperatures ranging from 27°C to 47°C. In this phase, mesophilic microorganisms will remodel the remaining cellulose and hemicellulose from the previous process. On the seventh to the fourteenth days, there was a relatively uniform (stable) increase and a decrease in temperature at each reactorures ranging from 26°C -29°C. In this phase, organic matter was decomposed and C level decreased so that the energy needed by the bacteria to move also decreased, causing many bacteria to die. In the composting process, the material was stirred to mix it with bacteria to produce good compost and to regulate the entry of oxygen into the compost pile from the aeration process.

#### 4.2.2 Degree of acidity

The acidity was measured every day during 14-day composting using a digital pH meter. The acidity (pH) is a critical factor in the growth of microorganisms in compost. The function of this pH measurement is to determine the condition of the reactor in an acidic, basic or neutral state.


At the beginning of the composting process, the 0 pH could be obtained at reactors control (5.2), reactor B1 (5.2), reactor B2 (5.0) and reactor B3 (5.0) experiencing a decrease in pH along with the increase in temperature on the 1st and 2nd day. At the beginning of the process, the pH decreased due to the activity of microorganisms form organic acids. After decreasing, the pH value increased until it reached the highest pH of 8.2 in the B1 reactor on the 8th day. This was due to the formation of  $\text{NH}_3$  during the decomposition process and the presence of dolomite lime in which dolomite lime also increased the soil pH, because dolomite lime was dissociated into  $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ , and  $\text{CO}_3^{2-}$  ions in the soil and due to an increase in the pH value, odor produced in the composting process also reduced and removed the smell of the soil (Danner, 2010). Dolomite increased the soil pH and supply of Mg and Ca shifted the position of  $\text{H}^+$  on the colloidal surface so the soil acidity could be neutralized

From day 10 to 14, the pH was shown to be stable. This shows that the compost in mature conditions was control ractor (7.5), reactor B1 (7.8), reactor B2 (8.0) and reactor B3 (8.0). This decreased because of the enzymatic oxidation of inorganic compounds resulted from the decomposition process and was suspected to be caused by the microorganisms in the composting process which were in the stationary phase, where the degradation activity will be stable so that the heat produced tends to be stable. According to Minister of Agriculture Regulation No. 70 of 2011, the good pH for solid organic fertilizers was the maximum of 9.

#### 4.2.3 Moisture

According to Som et al. (2009) one of the key factors indicating that composting runs fast is the water content. Water content has an important role in composting because the decomposition of organic material depends on it.

In this composting process, the main ingredients were food waste chopped using a chopper and produced 78.94 of moisture. In the composting process, too high water content causes anaerobic conditions, because pores are more dominantly filled by water than air so that the availability of oxygen is limited. Because food waste has high water content, it is necessary to add bulking agents which in this case was the compost. It was to provide a supporting structure for the pile of materials, providing air pores between particles and facilitating the movement of air through the mixture of materials to obtain an initial water content of 50-60% mixture. Then, the main ingredient (food waste) was calculated with a bulking agent (compost) because the water content of 50-60% was the optimum condition for developing microbes. A good balance between the pore space and the amount of water allowed microbes to develop well in degrading organic matter. Changes in water content in the composting process can be seen in Figure 3.

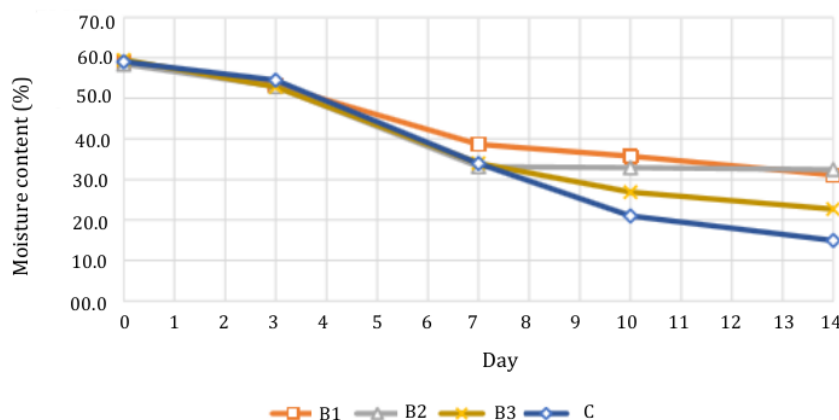

**Figure 3.** Graph of the relationship between moisture content and composting time

Based on Figure 3, each reactor has decreased during the composting time. The highest water content was in the reactor B1 while the lowest was in the control reactor. The difference in water content with the same composition can be caused by the inadequate stirring so that there were still some ingredients not exposed to aeration. In this composting process, the aerated discharge was used at 3 liters/minute. Based on some previous related research, the use of 3 liters/minutes aeration discharge was able to produce a small amount of leachate indicating the low water content in composting. The presence of aeration affects the production of leachate. The water content in waste decreases through two phases, namely the evaporating water molecules (from the liquid to the gas) from the surface of the waste to the surrounding air, both evaporated water will be transported by air flow from aeration and transferred to the outside air.


Based on research, the water content in all reactors fulfill the criteria specified by SNI 19-7030-2004 which is the minimum water content of less than 50%. While the results of the study show that on the 7-14th day the water content in all reactors had reached  $\pm 30\%$ . The decrease in water content that occurs during the aerobic composting process was caused by the consumption of microorganisms in water and the presence of reversal or stirring activity (Ayuningtyas, 2009).

#### 4.2.4 C/N Ratio

The C/N ratio indicates the decomposition process in composting and compost maturity has occurred. It is obtained from the comparison between carbon and nitrogen. Elements of carbon and organic matter are for example carbohydrates while the ones of nitrogen are e.g. protein, nitric acid, ammonia, etc. Microbes break down compound C as an energy source and use N for protein synthesis. Carbon element (C) produces energy while nitrogen (N) builds cell and bacterial structures. If the C ratio is too high, microbes will lack N for protein synthesis so the decomposition runs slowly. The relationship between the addition of bio-activator and the time of composting to the C/N ratio can be seen in Figure 4.

Based on research data, the four reactors had different C/N ratios and experience both increases and decreases during the composting process until the end of the study. Fluctuation that occurred was influenced by the type of organic material used and ideal conditions in the pile where microorganisms could grow and develop rapidly. On day 0 the results of the C/N ratio were around 26-29 and on the last day of composting (the 14th day), there was a decline of around 13-19. Overall, the value of the C/N ratio of all reactors tended to decrease and in accordance with the

regulations of SNI 19-7030-2004, this occurred after nitrogen and protein were broken down into ammonia. In this case, a nitrification process occurred that converted ammonia to nitrate. The highest C/N ratio results in the B3 reactor, 19.48. According to Azizah et al. (2017), in the decomposition of organic matter, some C will be assimilated in microorganisms and some will be lost in the form of CO<sub>2</sub> by the process of respiration. The C/N ratio of microorganisms ranged from 10. Therefore, if the material had a high C/N ratio, it had to be received additional N, and if the C/N ratio of organic matter was low then too much N will be lost. Different results on B3 variations were the increase in the C/N ratio on days 7 to 14. The rise of C/N ratio value was also influenced by the compost pile in an alkaline state, leading NH<sup>+</sup> to be insufficient for NH<sub>3</sub> to be converted to NH<sub>4</sub><sup>+</sup> so that NH<sub>3</sub> was volatilized to N<sub>2</sub> into the air, and resulted in a slight increase in N levels. In addition, it was also influenced by the level of C in the composting material used. Too much C content in the food material produces a high C value.

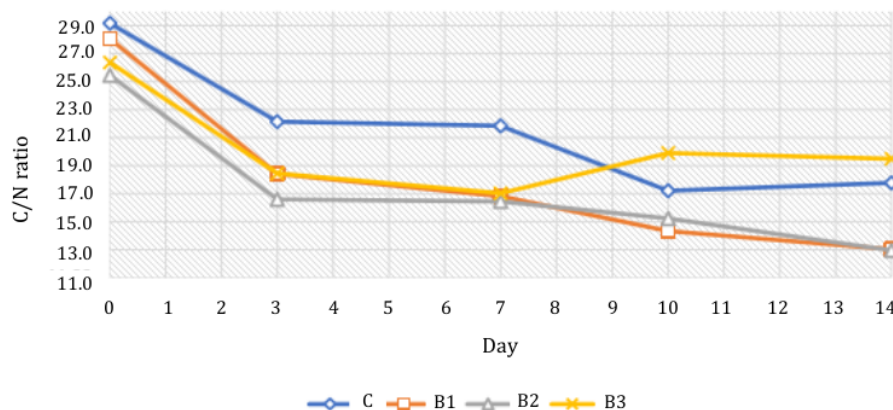

**Figure 4.** Graph of the C/N ratio when composting

The length of time composting organic material with the aerobic method, according to Tchobanoglous & Kreith (2002), ranges from 20 to 30 days. Based on the description, it was found that the addition of two different compositions of additive microorganism accelerates composting time to 7 and 14 days. The addition of activators was proven to be able to decompose organic matter effectively so that the ripening process could be faster and in according to Ariyanti (2018), bulking agents (mature compost) are used in the composting process as a medium for air movement by increasing porosity, absorption, and degradation rates of the composting material. The composting time is influenced by the initial C/N ratio because the higher the C/N ratio is, the longer the composting will last. Broadly speaking, the results of the C/N ratio on all compost variations at the end of the experiment successfully met the SNI 19-7030-2004 mature compost with the C/N ratio of 10-20.

## 5. Conclusions

The best composition between food waste and additive microorganisms for composting is 7:3. To get a much better result, the addition of 1 gram of dolomite lime is necessary. The composting time in reactors B2 and B3 was more effective which was just seven days compared

to reactors K and B1 which reached 14 days. The reactor B2 had a C/N ratio of 16.71 and the reactor B3 had a C/N ratio of 18.37, then the composting time in the reactor B2 was more effective (7 days) and had a better compost maturity.

### Acknowledgment

Thank you, the writer conveyed to the Department of Environmental Engineering, Faculty of Engineering, Diponegoro University, which has facilitated laboratory and funded the study (RKAT of Faculty of Engineering Universitas Diponegoro in 2018).

### References

- Ariyanti, V. T. D. (2018). *Efektifitas Penggunaan Bulking Agents Berupa Tongkol Jagung (Corncobs), Jerami Padi (Chopped Mature Hay) dan Serut Kayu (Wood Shaving) Dalam Proses Pengomposan Limbah Sisa Makanan*. Uinversitas Diponegoro.
- Ayuningtyas, D. N. (2009). *Pengaruh Sistem Aerasi dan Ketersediaan Oksigen Terhadap Laju Proses Pengomposan dan Kualitas Kompos Berbahan Baku Limbah Pencucian Biji Kakao Terfermentasi, Serasah Daun dan Kotoran Sapi*. Institut Pertanian Bogor.
- Azizah, A., Zaman, B., & Purwono, P. (2017). *Pengaruh Penambahan Campuran Pupuk Organik Kotoran Sapi dan Kambing Terhadap Kualitas Kompos dari Sampah Daun Kering di TPST UNDIP*. Theses. Universitas Diponegoro, Semarang.
- Barrena, R., Font, X., Gabarrell, X., & Sánchez, A. (2014). Home composting versus industrial composting: Influence of the composting system on compost quality with a focus on compost stability. *Waste Management*, 34(7), 1109-1116.
- Bernal, M. P., Alburquerque, J. A., & Moral, R. (2009). Bioresource Technology Composting of animal manures and chemical criteria for compost maturity assessment. A review. *Bioresource technology*, 100(22), 5444-5453.
- Danner, S. (2010). Peningkatan pH tanah masam di lahan rawa pasang surut pada berbagai dosis kapur untuk budidaya kedelai. *Jurnal Agroqua*, 8(2), 1-5.
- Fan, Y. Van, Tin, C., Roji, M., & Woh, C. (2017). Evaluation of Effective Microorganisms on home scale organic waste composting. *Journal of Environmental Management*, 216, 41-48.
- Justice, J., Tucker, P., Speirs, D., Fletcher, S. I., Edgerton, E., & Mckechnie, J. (2010). Local Environment: The International Factors Affecting Take-up of and Drop- Factors Affecting Take-up of and Drop-out from Home Composting Schemes, (March 2015), 37-41. <https://doi.org/10.1080/13549830306660>
- Keener, H. M., Dick, W. A., & Hoitonk, H. A. J. (2000). *Composting and Beneficial Utilization of Composted By-Product Materials*. Ohio, USA.: Ohio Agricultural Research and Development Center, Wooster, Ohio, USA. <https://doi.org/10.2136/sssabookser6.c10>
- Pereira, B. F. F., He, Z., Stoff, P. J., Montes, C. R., Melfi, A. J., & Baligar, V. C. (2012). Nutrients and Nonessential Elements in Soil after 11 Years of Wastewater Irrigation, *Journal of Environmental Quality*, 41(3), 920-927. <https://doi.org/10.2134/jeq2011.0047>
- Simanungkalit, R. D. M., Didi, A. S., Rasti, S., Diah, S., & Wiwik, H. (2006). *Pupuk Organik dan Pupuk Hayati*. Jawa Barat: Balai Besar Penelitian dan Pengembangan Sumberdaya Lahan Pertanian.

- Som, M., Lemée, L., & Amblès, A. (2009). Bioresource Technology Stability and maturity of green waste and biowaste compost assessed on the basis of a molecular study using spectroscopy, thermal analysis, thermodesorption and thermochemolysis, *Bioresource technology*, 100(19), 4404–4416. <https://doi.org/10.1016/j.biortech.2009.04.019>
- Tchobanoglous, G., & Kreith, F. (2002). *Handbook of Solid Waste Management Second Edition* (Second). New York: McGraw-Hill.
- Zhang, D., He, P., Jin, T., & Shao, L. (2008). Bioresource Technology Bio-drying of municipal solid waste with high water content by aeration procedures regulation and inoculation, *Bioresource Technology*, 99 (18), 8796–8802. <https://doi.org/10.1016/j.biortech.2008.04.046>

# Fast decomposition of food waste to produce mature and stable compost

## ORIGINALITY REPORT

8%

SIMILARITY INDEX

%

INTERNET SOURCES

4%

PUBLICATIONS

4%

STUDENT PAPERS

## PRIMARY SOURCES

1

Submitted to Thammasat University

Student Paper

1%

2

Submitted to University of Florida

Student Paper

1%

3

Submitted to Universitas Airlangga

Student Paper

1%

4

Lucas Lourenço Castiglioni Guidoni, Roger Vasques Marques, Rodrigo Bilhalva Moncks, Fabiana Torma Botelho et al. "Home composting using different ratios of bulking agent to food waste", Journal of Environmental Management, 2018

Publication

1%

5

Submitted to Australian Catholic University

Student Paper

1%

6

H. Jouhara, D. Czajczyńska, H. Ghazal, R. Krzyżyńska, L. Anguilano, A.J. Reynolds, N. Spencer. "Municipal waste management systems for domestic use", Energy, 2017

Publication

1%



7	K. Shaw, M. Day, S. Sheehan, M. Krzymien, R. Mohmad. "The role of feed composition on the composting process. I. Effect on composting activity*", Journal of Environmental Science and Health, Part A, 1999 Publication	<1 %
8	"Utilization of By-Products and Treatment of Waste in the Food Industry", Springer Science and Business Media LLC, 2007 Publication	<1 %
9	Submitted to University of Keele Student Paper	<1 %
10	A Budiyanto. "A dynamic model for managing urban waste in Bogor City, West Java Province", IOP Conference Series: Earth and Environmental Science, 2021 Publication	<1 %
11	Sunil Kumar. "Composting of municipal solid waste", Critical Reviews in Biotechnology, 2010 Publication	<1 %
12	PHYLLIS A. HICKS. "THE CARBON/NITROGEN RATIO IN THE WHEAT PLANT", New Phytologist, 4/1928 Publication	<1 %

- |    |  |      |
|----|--|------|
| 13 | Maresh W. Jayaweera. "Biogas production from water hyacinth (Eichhornia crassipes (Mart.) Solms) grown under different nitrogen concentrations", Journal of Environmental Science and Health Part A, 6/2007<br>Publication   | <1 % |
| 14 | Masoud Kayhanian, George Tchobanoglous. "Characteristics of humus produced from the anaerobic composting of the biodegradable organic fraction of municipal solid waste", Environmental Technology, 1993<br>Publication  | <1 % |
| 15 | Submitted to Cranfield University<br>Student Paper   | <1 % |
| 16 | Submitted to International Islamic University Malaysia<br>Student Paper  | <1 % |
| 17 | Tiantian Liu, Chongwei Cui, Junguo He, Jian Tang. "Effect of different bulking agents on water variation and thermal balance and their respective contribution to bio-generated heat during long-term storage sludge biodrying process", Environmental Science and Pollution Research, 2018<br>Publication | <1 % |
| 18 | A Zaeni, P E Susilowati, Harlia, N Rasmin. "Anaerobic digestion of solid and liquid  | <1 % |

organic waste with microorganism from manure", IOP Conference Series: Earth and Environmental Science, 2019

Publication

19

Bernal, M.P.. "Composting of animal manures and chemical criteria for compost maturity assessment. A review", Bioresource Technology, 200911

Publication

<1 %

20

Li, Xiaowei, Xiaohu Dai, Shijie Yuan, Ning Li, Zhigang Liu, and Jingwei Jin. "Thermal analysis and 454 pyrosequencing to evaluate the performance and mechanisms for deep stabilization and reduction of high-solid anaerobically digested sludge using biodrying process", Bioresource Technology, 2015.

Publication

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On

# Fast decomposition of food waste to produce mature and stable compost

GRADEMARK REPORT

FINAL GRADE

/1

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

PAGE 12