

B3 Turnitin- Performance Analysis of Wind Power Generation Models Using

by susastro susastro

Submission date: 10-May-2023 09:04PM (UTC+0700)

Submission ID: 2089332151

File name: -_Performance_Analysis_of_Wind_Power_Generation_Models_Using.pdf (796.6K)

Word count: 2561

Character count: 12601

1 Performance Analysis of Wind Power Generation Models Using Oscillating Water Column

Susastro^{1*}, Ardi Noerpamoengkas², Miftahul Ulum³, Gatot Setyono⁴

¹)Vocational School, Diponegoro University

Hayamwuruk Street, Peleburan, Semarang, 50241,Indonesia

^{2,3,4})Mechanical Engineering Dept. Adhi Tama Surabaya Institut of Technology

Arif Rahman Hakim Street, 60111, Surabaya

*email:sastrom51@gmail.com

ABSTRACT

DOI;
10.30595/jrst.v4i2.6020

Received:
2019/11/29

Revised:
2020/05/27

Accepted:
2020/07/25

In this global era there are many resources that can be used one of them is, renewable resources such as sea waves. waves can be used as a generated of electrical energy. electrical energy that utilizes the occurrence of sea waves now can be applied in developed and developing countries. One method of conversion that can be done to convert wave energy into electrical energy is by using an oscillating water column. In this research, the turbine of oscillating water column was made using turbine wells with variations in rotation at 40, 50 and 58.3 rpm. the results it's power of turbine, power of generator and efficiency system. The method used is the experimental method by testing the prototype using a low water wave on a laboratory scale. The results obtained from the experiment are that the electric power at the maximum load generated by the generator is 0.002875 Watt at a rotation of 50 rpm. While the lowest electric power at maximum load is 0.0004 W with a rotation of 40 rpm. The maximum efficiency of the system at load is 4.691% which occurs at a rotation of 50 rpm.

Key Words: Wave, turbine wells, oscillating water column.

1. INTRODUCTION

Indonesia is an archipelago that has many islands and vast oceans. Where the area of Indonesia includes waters and coastlines. Therefore Indonesia has many opportunities in developing renewable energy, one of which is energy related to ocean waves (Lejerskog, Boström, Hai, Waters, & Leijon, 2015; O'Sullivan & Lewis, 2008). There are many ways in utilizing sea wave energy into electrical energy, among others, by using a translational transformer into a rotational motion and finally making a rotational motion on the generator as practiced by (Miftahul Ulum, 2018). From the research results obtained that the wave energy generated from the laboratory scale testing pool the energy produced is 0.9018 watts. While the electrical energy produced at the actual ocean scale by the mechanism is 95.97 watts at a sea wave height of 2.9 meters.

Indonesian seas, especially in Java sea waters, have an average wave height of 2,986 meters with wavelengths between 559,017 and 883,883 meters and periods of 56,579 and 89,360 seconds (Nadzir, Jaelani, & Sulaiman, 2016; Tae, Jasron, & Koehuan, 2015) conducted a study by planning turbine wells used in the mechanism of sea wave power generation (PLTGL) using oscillations of water columns with a capacity of 10 kW. From the results of the study it can be concluded that the electric power generated by ocean waves using PLTGL-OWC can be produced with the smallest energy of 563.3089 Joules in March and April, while the largest energy produced is 3,762,948.04 Joules in March and April. For the use of the Wells turbine with a simulation that is used to produce turbine mechanical power of 15031, 13 Watt, with 24.544% water column oscillation efficiency.

Conduct **23** a study which also discussed the Oscillating Water Column (OWC) system in **thirty** Indonesian marine areas (Indonesia et al., 2010). From the research obtained by coastal waters in Indonesia has the potential that can be used to implement the oscillating water column PLTGL system. Where the smallest power that can be produced is 246,0294 watts in the Malacca Strait waters. The biggest power that can be produced is 1,968,235 watts in the **16**thern waters of Banten to the West Java, southern waters of Central Java, the southern waters of East Java and the Arctic Sea Waters. (Wijaya, 2010) conducted the same research in the waters of Bali. From the results of his research it can be concluded using the ocean wave power plant oscillating water column method in the Jimbaran sea region producing the largest energy is 16,478,982.17 Joules and the lowest is 92,5897 J. while for the electric power generated is 4,174,007 watts and the lowest is 175.89 watts. . At the location of placement at a depth of 50 m above sea level and a distance of approximately 2.8 km from the Jimbaran coastline. Sea wave power plant **13** using the oscillating water column method can be seen in Figure 1.

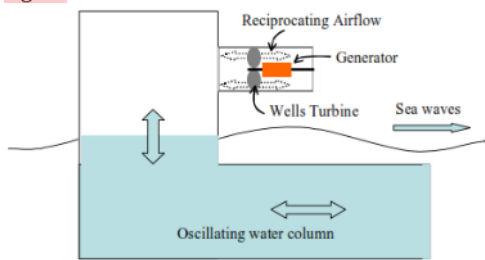


Figure 1. Schematic of ocean wave movement on oscillating water column (Kazmierkowski & Jasiński, 2010)

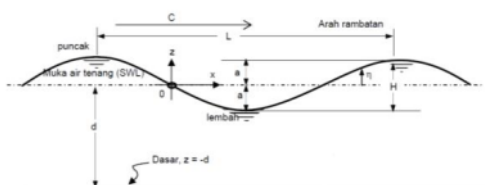


Figure 2. Sea wave in x-z coordinate (Sebastian Brusca et al., 2017)

OWC is one of the systems and equipment that can convert ocean wave energy into electrical energy by using oscillation columns (Michael E Mc Cormick, 2010). This OWC tool will capture the wave energy that hits the OWC door opening, resulting in fluctuations or oscillations of water movement in the OWC space, then this air pressure will drive the turbine blades that are connected to an electric generator so as to produce electricity. In this OWC technology, air pressure from a waterproof room is used to drive the turbine wheels which later on the movement of this turbine is used to produce electrical energy (S. Brusca, Lanzafame, & Messina, 2014; Sebastian Brusca et al., 2015). The theory of ocean waves was first proposed by Airy in 1845. The modeling of linear sea waves is shown in Figure 2 below.

Figure 2 shows a wave in the x-z coordinate system. Waves move on the x-axis with wave heights H (m), wavelength L (m), and SWL or mean sea water level (calm water level). Wave potential energy can be written with the following equation.

$$E = 1/2 \rho g A^2 \dots \dots \dots (1)$$

Where E is the wave potential energy (joules), g the acceleration due to gravity, ρ water density, and A amplitude (meters).

In previous research there was no discussion about testing ocean wave power generation systems using OWC. therefore in this research we will use OWC (oscillating water column) system with wells turbine in laboratory scale. rotational speed is given a change between 40, 50, and 58.3 rpm.

2. METHOD

The experimental method is used, where the first step is done by designing the OWC prototype that will be used. the next step is to determine the materials and equipment that will be used in making OWC prototypes, then determine the speed of the motor that will be used in the experiment. In testing the OWC prototype variations of the parameters used are motor speed with rotation of 40 rpm, 50 rpm, and 58.3 rpm. The prototype is shown in Figure 3.



Figure 3. Prototype OWC

Figure 3 is a prototype of the OWC that is used as an experimental tool. The experiment is done by making an oscillation wave using a drive motor with power $\frac{1}{4}$ Hp, rotational speed of 1400 rpm, then the motor rotation will be transmitted to the pulley and drive the gear ratio connected to the oscillation wave making mechanism. Furthermore, the wave will enter the OWC column in which there is space that will form an air movement which circulates in accordance with the waves that enter the OWC system. The air that is circulating will drive the turbine wells that are in the system. As for the image of the turbine wells shown in Figure 4.

Figure 4 is a turbine wells design made for the prototype of the OWC system. Turbine wells that are driven by air flow due to vacuum will rotate to move the generator. The specifications of the turbine wells used are shown in Table 1.

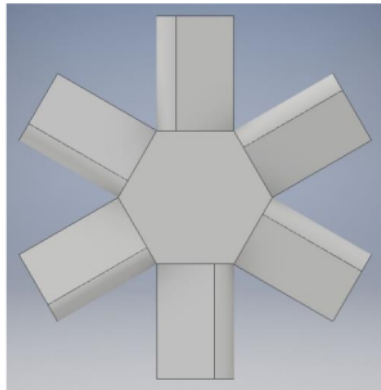


Figure 4. Turbin wells used in OWC systems

Table 1. Weels Turbine Specification

No.	Parameter	Dimension
1	Diameter	97 mm
2	Thicknes	10 mm
3	Blade width	20 mm
4	Blade Angle	18.26°
5	Blade width	20 mm
6	Blade Long	30 mm

The DC generator used in the OWC system, while the 2 LED lamps in parallel arrangement as an electrical load. Electrical loading is done by varying one lamp and a maximum load of 2 lights. The measurement tools are multi tester, tachometer, amperage pliers, and anemometer. Experiments were conducted to determine the power generated by the OWC system with variations in rotational speed between 40, 50 and 58.3 rpm and to determine the efficiency of the prototype OWC system.

3. RESULT AND DISCUSION

From the experimental results using the OWC system with well turbine, we generate the system performance as figure 5. From Figure 5 it can be seen that variations in gear rotational speed can affect the wave height that occurs. the wave height reaches 0.19 m at a rotational speed of 40 rpm, the wave height reaches 0.25 m at a rotational speed of 50 rpm, and the wave height reaches 0.13 m at a rotational speed of 58.3 rpm. from this condition it can be concluded that the optimal rotation that can be given to the OWC system is 50 rpm. if the system is given a higher spin, then the oscillation of the resulting wave will not be stable and will damage the frequency of the waves caused.

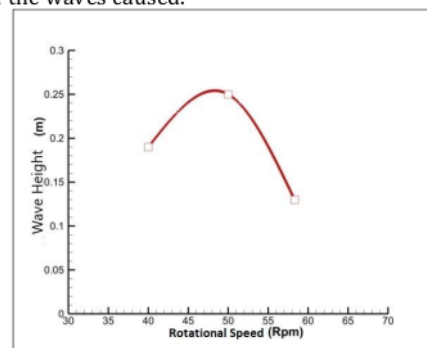


Figure 5. Wave height as a function of rotational speed

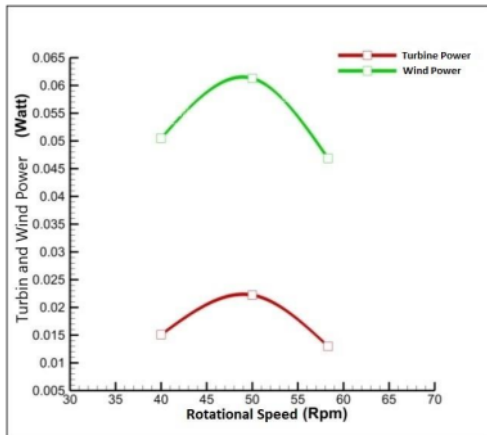


Figure 6. Comparison of turbin power and wind power

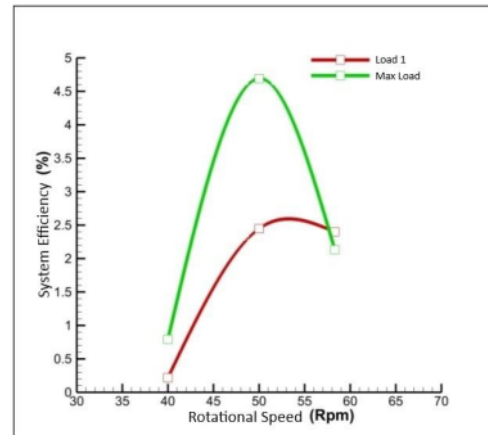


Figure 8. Comparison efficiency system in max load and load 1

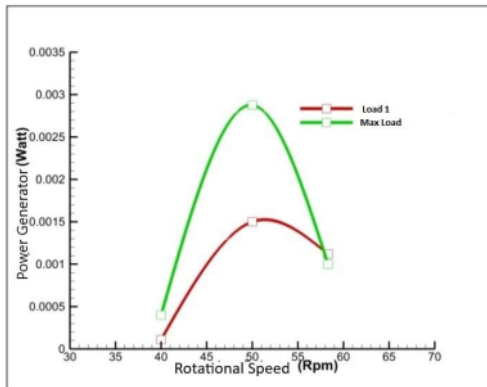


Figure 7. Comparison of power generator in max load and load 1

The results of rotational speed change on turbine and wind power obtained the highest value of power generation occurs at 50 rpm rotation, with wind power 0.06128 watts and turbine power 0.02227 watts. While the lowest power at 58.3 rpm rotation. From these results it can be said that in OWC systems wave height greatly influences system performance.

From Figure 7 it can be seen that the rotation speed affects the power produced by the generator. Where the highest power occurs at 50 rpm speed with a single lamp load of 0.001500 Watt power and a maximum load of 0.002875 Watt. The lowest power occurs at a rotational speed of 40 rpm with a single lamp generator power load of 0,000110 Watt and a maximum load of 0,0004 Watt.

The effect of speed variations on the efficiency of the system has the same trend line as Figure 8. the power produced will be even greater with greater efficiency. but the power produced will be smaller if the resulting efficiency is low. the highest efficiency curve occurs at a speed of 50 rpm with an efficiency at a load of 2.447% and a maximum load efficiency of 4.691%. while the lowest efficiency occurs at a rotational speed of 40 rpm with a lamp load efficiency of 0.218% and a maximum load efficiency of 0.793%.

4. CONCLUSION

The biggest power produced by the OWC system is 0.0222271 Watt and occurs at a rotating speed of 50 rpm. While the smallest power generated is 0.0129979 Watt at 58.3 rpm rotational speed. The largest electric power generated by the generator at a lamp load of 0.0015 Watt and a maximum load of 0.002875 Watt that occurs at a gear rotation speed of 50 rpm. While the lowest power at the load of one lamp is 0,000110 Watt and the maximum load is 0,000400 Watt which occurs at a rotational speed of 40 rpm. The greatest system efficiency produced in turbine wells at a single lamp load of 2.447% and a maximum load of 4.691% which occurs at a rotational speed of 50 rpm. In the OWC system the wave height influences the rotation produced by the turbine wells, which of course will affect the power and rotation generated by the generator.

BIBLIOGRAPHY

- 3 Brusca, S., Lanzafame, R., & Messina, M. (2014). Design of a vertical-axis wind turbine: how the aspect ratio affects the turbine's performance. *International Journal of Energy and Environmental Engineering*, 5(4), 333-340. <https://doi.org/10.1007/s40095-014-0129-x>
- 4 Brusca, Sebastian, Cucinotta, F., Galvagno, A., Lanzafame, R., Mauro, S., & Messina, M. (2015). Oscillating Water Column Wave Energy Converter by means of straight-bladed Darrieus turbine. *Energy Procedia*, 82, 766-773. <https://doi.org/10.1016/j.egypro.2015.11.809>
- 7 Brusca, Sebastian, Galvagno, A., Lanzafame, R., Cugno Garrano, A. M., Mauro, S., & Messina, M. (2017). On the turbine-induced damping in Oscillating Water Column wave energy converter. *Energy Procedia*, 126, 581-588. <https://doi.org/10.1016/j.egypro.2017.08.215>
- 8 Indonesia, U., Utami, S. R., Teknik, F., Studi, P., Elektro, T., & Listrik, K. T. (2010). *Gelombang Laut Dengan Menggunakan Sistem Oscilating Water Column (Owc) Di Tiga Puluh Wilayah Kelautan Indonesia*
- 6 Kazmierkowski, M. P., & Jasiński, M. (2010). Power electronics for renewable sea wave energy. *Proceedings of the International Conference on Optimisation of Electrical and Electronic Equipment, OPTIM*, 4-9. <https://doi.org/10.1109/OPTIM.2010.5510476>
- 2 Lejerskog, E., Boström, C., Hai, L., Waters, R., & Leijon, M. (2015). Experimental results on power absorption from a wave energy converter at the Lysekil wave energy research site. *Renewable Energy*, 77, 9-14. <https://doi.org/10.1016/j.renene.2014.11.050>
- Michael E Mc Cormick. (2010). Ocean Engineering Mechanics. In *Cambridge* (Vol. 1).
- Miftahul Ulum. (2018). Jurnal iptek. *Jurnal IPTEK*, 18(1), 29-36. <https://doi.org/10.31284/j.ipitek.2018.v22i2>
- 12 Nadzir, Z. A., Jaelani, L. M., & Sulaiman, A. (2016). Estimasi tinggi gelombang laut menggunakan citra satelit alos-palsar. *Jurnal Geosaintek*, 02(03), 173-184. <https://doi.org/10.12962/j25023659.v2i3.2102>
- 9 O'Sullivan, D. L., & Lewis, A. W. (2008). Generator selection for offshore oscillating water column wave energy converters. *2008 13th International Power Electronics and Motion Control Conference, EPE-PEMC 2008*, 1790-1797. <https://doi.org/10.1109/EPEPEMC.2008.4635525>
- 21 Tae, J., Jasron, J. U., & Koehuan, V. A. (2015). Perencanaan Turbin Wells Sistem Osilasi Kolom Air pada Pembangkit Listrik Tenaga Gelombang Laut dengan Kapasitas 10 kW. *LONTAR Jurnal Teknik Mesin Undana (LJTMU)*, 02(02).
- 11 Wijaya, I. W. A. (2010). Pembangkit Listrik Tenaga Gelombang Laut Menggunakan Teknologi Oscilating Water Column Di Perairan Bali. *Majalah Ilmiah Teknik Elektro*, 9(2), 165-174. <https://doi.org/10.24843/10.24843/MITE>

B3 Turnitin- Performance Analysis of Wind Power Generation Models Using

ORIGINALITY REPORT

20%

SIMILARITY INDEX

19%

INTERNET SOURCES

14%

PUBLICATIONS

14%

STUDENT PAPERS

PRIMARY SOURCES

1	exaly.com Internet Source	2%
2	www.diva-portal.org Internet Source	2%
3	Submitted to Camas High School Student Paper	2%
4	journals2.usm.ac.id Internet Source	2%
5	Submitted to Universitas Sebelas Maret Student Paper	1%
6	www.ujecology.com Internet Source	1%
7	Submitted to University of Plymouth Student Paper	1%
8	cosphijournal.unisan.ac.id Internet Source	1%
9	Submitted to University of Technology, Sydney	1%

10	ejurnal.undana.ac.id Internet Source	1 %
11	repository.ub.ac.id Internet Source	1 %
12	www.apmg.uni-bonn.de Internet Source	1 %
13	pearl.plymouth.ac.uk Internet Source	1 %
14	www.neliti.com Internet Source	1 %
15	Susastro Susastro, Novi Indah Riani, Alaya Fadlu Hadi Muhammad. "Karakteristik Respon Getaran Sistem 2 DOF Setelah Penambahan Independent Dual Translational Dynamic Vibration Absorber", JRST (Jurnal Riset Sains dan Teknologi), 2019 Publication	<1 %
16	Submitted to Udayana University Student Paper	<1 %
17	Submitted to Caledonian College of Engineering Student Paper	<1 %
18	bestjournal.untad.ac.id Internet Source	<1 %

19 jurnalnasional.ump.ac.id <1 %
Internet Source

20 dokumen.pub <1 %
Internet Source

21 repository.umsu.ac.id <1 %
Internet Source

22 repository.upi.edu <1 %
Internet Source

23 zh.scribd.com <1 %
Internet Source

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off

B3 Turnitin- Performance Analysis of Wind Power Generation Models Using

GRADEMARK REPORT

FINAL GRADE

/100

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5
