

# Electrosynthesis of $\text{Al}(\text{OH})_3$ by $\text{Al}(\text{s})|\text{KCl}(\text{aq})||\text{KCl}(\text{s})|\text{C}(\text{s})$ system

*by* Gunawan Gunawan

---

**Submission date:** 26-Nov-2020 10:49AM (UTC+0700)

**Submission ID:** 1457347353

**File name:** C-20\_oke.pdf (981.75K)

**Word count:** 2606

**Character count:** 12560

**PAPER · OPEN ACCESS**

3

## Electrosynthesis of $\text{Al}(\text{OH})_3$ by $\text{Al}(\text{s})|\text{KCl}(\text{aq})||\text{KCl}(\text{s})|\text{C}(\text{s})$ system

17

To cite this article: Linda Suyati *et al* 2019 *IOP Conf. Ser.: Mater. Sci. Eng.* **509** 012066

6

View the [article online](#) for updates and enhancements.**IOP | ebooks™**

Bringing you innovative digital publishing with leading voices  
to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of  
every title for free.

### 3

## Electrosynthesis of Al(OH)<sub>3</sub> by Al(s)|KCl(aq)||KCl(s)|C(s) system

Linda Suyati<sup>1\*</sup>, Intan Dian Nur Fadilah<sup>1</sup>, Didik Setiyo Widodo<sup>1</sup>, Gunawan<sup>1</sup>,  
W H Rahmanto<sup>1</sup>

<sup>1</sup> Chemistry Department, Faculty of Sciences and Mathematics, Diponegoro University, Semarang, Indonesia

\* Correspondence email: linda\_suyati@live.undip.ac.id

**Abstract.** Electrosynthesis of Al(OH)<sub>3</sub> by using Al(s)|KCl(aq)||KCl(s)|C(s) system had been done. The presence of electrolyte was much influenced to the electrolysis result. The purpose of this work was to investigate the purity of Al(OH)<sub>3</sub> compound with the presence of KCl concentration using XRD characterization. Electrolysis process was done in 2-compartment system, by using aluminium plate electrode as anode, carbon electrode as cathode, and electrolyte solutions of KCl were varied at the concentrations of 0.25; 0.30; 0.35; 0.40; 0.45 M. The electrolysis process was done at room temperature and potential of 12 V for 6 h. The electrolysis products were characterized using XRD and the best electrolysis result was determined its thermal property by using TGA-DSC. The result showed that electrolysis of Al(s)|KCl(aq)||KCl(s)|C(s) system with the variation of electrolyte concentration solutions gave white precipitations with the masses of 50.6; 51.8; 56.1; 64.9; 97.2 mg, respectively. The XRD characterization of the electrolysis product precipitates gave the best product as Al(OH)<sub>3</sub> when using KCl concentration of 0.3 M, while at KCl concentration of 0.45 M was resulted KAlOCl<sub>2</sub>, and another variation KCl concentration gave a mixture product of Al(OH)<sub>3</sub> and KAlOCl<sub>2</sub>. Thermal analysis result of the best electrolysis product using TGA-DSC showed the reduced total sample mass of 45.47 % and two endothermic peaks at 270.08°C as the transformation of Al(OH)<sub>3</sub> to AlOOH (boehmite) with the absorbed energy of 2.47 kJ/mol. At temperature of 660.28°C was the phase change of AlOOH (boehmite) to γ-Al<sub>2</sub>O<sub>3</sub> with absorbed energy of 0.23 kJ/mol. Then, at temperature above 800°C there was no mass reduction, that meant it formed stable phase of Al<sub>2</sub>O<sub>3</sub>. To sum up, the purity of Al(OH)<sub>3</sub> compound was much influenced by KCl concentration and the increase of temperature transformed the Al(OH)<sub>3</sub> sample to AlOOH (boehmite) and γ-Al<sub>2</sub>O<sub>3</sub>.

### 1. Introduction

Al(OH)<sub>3</sub> is metal hydroxide that is much used as flame retardant additives for polymer due to its property in thermal degradation that absorbs heat (endothermic), releases water, and forms oxide film of Al<sub>2</sub>O<sub>3</sub> at the surface of polymer [1]. Electrosynthesis is a part of electrolysis methods that uses electricity to produce chemical reactions, in this case that involving redox reaction, such as electrosynthesis of Al(OH)<sub>3</sub>. The method has advantages such as using small amount of reactant, the process is simple and fast [2].

Synthesis of Al(OH)<sub>3</sub> was done by Tchomgui-Kamga *et al.* [3] with electrolysis method using 1-compartment system. An aluminium metal electrode with successive electrolyte solutions of Al<sub>2</sub>(SO<sub>4</sub>)<sub>3</sub>, Al(NO<sub>3</sub>)<sub>3</sub>, AlCl<sub>3</sub>, (NH<sub>4</sub>)<sub>2</sub>SO<sub>4</sub>, NH<sub>4</sub>Cl, (NH<sub>4</sub>)HCO<sub>2</sub>, Na<sub>2</sub>SO<sub>4</sub>, NaNO<sub>3</sub>, NaCl, NaClO<sub>4</sub>, Na<sub>2</sub>C<sub>2</sub>O<sub>4</sub>, NaCH<sub>3</sub>CO<sub>2</sub> were used in the system. The result of bayerite, Al(OH)<sub>3</sub>, was found in all solutions, except



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.




ammonium salts. While boehmite, AlOOH, was resulted from ammonium salts. Shalaby *et al.* [4] did an electrolysis in 1-compartment system using aluminium anode in electrolyte solutions of NaCl, KCl, NaNO<sub>3</sub>, and NaNO<sub>2</sub> with concentration variations of 0.5 to 5 g/L. The result was Al(OH)<sub>3</sub> and the higher electrolyte concentration increased the efficiency of the produced coagulation. In this work, we used different system as previous researches, since by using 1-compartment the main and side products will mix together and makes the product characterization difficult therefore, 2-compartment system was used [5, 6]. It contained aluminium as anode in one compartment and graphite as cathode in another compartment that was connected by salt bridge. Yan *et al.* [7] had done a synthesis by using 2-compartment system namely by separation of Al(OH)<sub>3</sub> and NaOH from NaAlO<sub>2</sub> solution with titanium coated with ruthenium as the electrodes. Graphite has an advantage of its inertness, therefore it is not easy to be oxidized or reduced, while aluminium anode as Al<sup>3+</sup> ion sources from its oxidation reaction. Electrolyte solution of KCl was used as in 1-compartment since it has a good conductivity, in this case the KCl concentrations were varied (0.25, 0.30, 0.35, 0.40, 0.45 M). The purpose of this work was to get Al(OH)<sub>3</sub> by electrosynthesis and to characterize the purity of the products using XRD as well as to get the thermal property of pure Al(OH)<sub>3</sub> using TGA-DSC.

## 2. Experiment methods


The solution of 200 mL KCl (concentrations of (0.25, 0.30, 0.35, 0.40, 0.45 M) was soaked to 2-compartment system. Aluminium electrode (9 cm x 4 cm) in anode compartment and 8 bar of graphite electrodes (from battery) in cathode compartment with the distance among the electrodes was 2.5 cm. The two compartments were connected with salt bridge. The electrolysis was done for 6 h with potential of 12 V and the electrolysis obtained product was Al(OH)<sub>3</sub>. Then, the product was filtered, dried and characterized using XRD (Shimadzu Maxima 7000) to know crystal products in Al(OH)<sub>3</sub> sample. TGA-DSC (Perkin Elmer 6000) was used to investigate the decomposition temperature and thermal property of the product.

## 3. Results and Discussion

In the electrolysis process, aluminium metal anode dissolve to form Al<sup>3+</sup> [4], while graphite is inert and remains stable, therefore in cathode compartment water will reduce to hydrogen gas. The reduction and oxidation reactions that occur in electrolysis process as the following [4]:



Overall reaction:




The cation of K<sup>+</sup> flows to cathode and reacts with OH<sup>-</sup> from water reduction reaction to form KOH. The reaction as follow [8]:



The formation of KOH was proven by the increase of pH solution at cathode compartment.

### 3.1. Effect of KCl concentration to electrolysis products


The increase in KCl concentration will improve the current that flows through the electrolysis cell [9], as consequence it will improve the precipitate resulted, as in shown in Fig. 1.

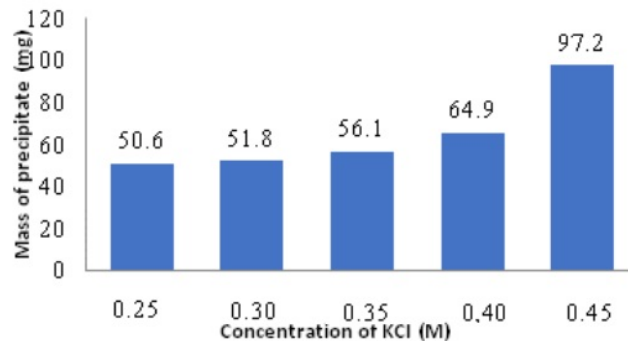

**Figure 1.** The correlation between electrolyte concentration (M) with electrolysis mass of precipitate products.

### 3.2. Characterization of electrolysis products

3.2.1. *X-ray Diffraction (XRD).* The diffractograms of electrolysis precipitate products with the varied concentrations of KCl can be seen in Fig. 2. The XRD characterization of the high peaks of the sample found was compared with JCPDS database number 20-0011 and 73-0631 for  $\text{Al}(\text{OH})_3$  (bayerite) and  $\text{KAlOCl}_2$  compounds, respectively.

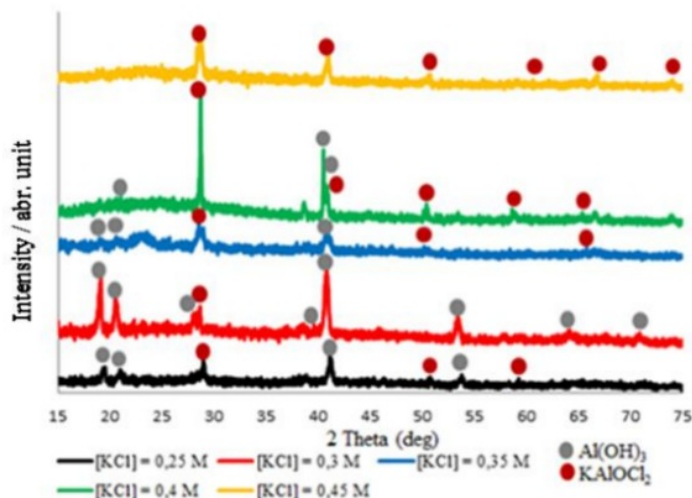

**Figure 2.** Diffractogram of electrolysis products with varied concentration of electrolytes.

The product resulted from electrolysis process with KCl concentration of 0.25 M was a mixture of  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$  as shown by the peaks at  $2\theta$  of 41.16, 19.43, 21.98. JCPDS database number 20-0011 and 73-0631 for  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$  have  $2\theta$  of 28.87, 50.77, 59.19 and 28.42, 40.63, 50.32, respectively. The product resulted from electrolysis in KCl 0.3 M was  $\text{Al}(\text{OH})_3$  shown by 8 peaks with 4 high peaks at  $2\theta$  of 40.79, 19.07, 20.60 as the peaks of  $\text{Al}(\text{OH})_3$ . Electrolysis with KCl 0.35 M produces a mixture of  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$  confirmed by the peaks at  $2\theta$  of 40.86, 19.10, 20.71 as  $\text{Al}(\text{OH})_3$  and the presence of peaks at  $2\theta$  of 28.64, 66.57, 50.40 as  $\text{KAlOCl}_2$ , while the electrolysis with KCl 0.40 M

also resulted a mixture of  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$  supported by the peaks at  $2\theta$  of 40.52, 40.76, 20.63 as  $\text{Al}(\text{OH})_3$ . The presence of  $\text{KAlOCl}_2$  is shown at  $2\theta$  of 28.69, 40.85, 50.39. Finally, the compound resulted from the electrolysis with  $\text{KCl}$  0.45M is a compound of  $\text{KAlOCl}_2$ . The presence of  $\text{KAlOCl}_2$  is shown by 6 peaks with 3 high peaks at  $2\theta$  of 28.67, 40.88, 50.57 as  $\text{KAlOCl}_2$ . Therefore the electrolysis result in  $\text{KCl}$  0.30 M gave  $\text{Al}(\text{OH})_3$  product as shown by 8 peaks of  $\text{Al}(\text{OH})_3$ . In  $\text{KCl}$  0.45 M as the highest concentration of  $\text{KCl}$  used is identified 6 peaks of  $\text{KAlOCl}_2$ . Meanwhile for other variation of  $\text{KCl}$  concentrations result a mixture of  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$ . The presence of  $\text{KAlOCl}_2$  can be possibly explain as follow. The  $\text{KCl}$  ion reacts with  $\text{Al}^{3+}$  ion released from electrolysis of aluminium anode to form  $\text{KAlCl}_4$ . The presence of  $\text{Al}_2\text{O}_3$  as the result of aluminium anodation [9] will react with  $\text{KAlCl}_4$  to form  $\text{KAlOCl}_2$  [10].

3.2.2. TGA-DSC. The electrosynthesis result from  $\text{KCl}$  0.3 M as the product is  $\text{Al}(\text{OH})_3$  analyzed by XRD above, was characterized using TGA-DSC instrument with heating temperature from  $50^\circ\text{C}$  to  $950^\circ\text{C}$  with heating rate of  $10^\circ\text{C}/\text{min}$ . Thermogram of the sample is depicted in Fig. 3.

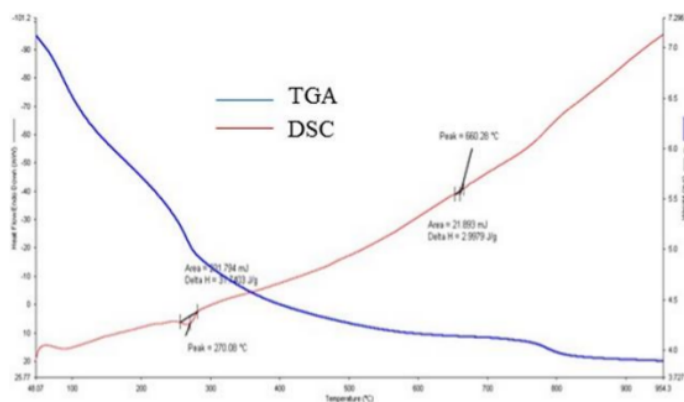


Figure 3. Curve of TGA-DSC of  $\text{Al}(\text{OH})_3$

DSC curve is formed two endothermic peaks and TGA curve shows the reduced mass of the sample. The sample mass loss is 45.47%. The hydroxyl release process occurs at temperature  $100\text{--}350^\circ\text{C}$  [10], with first endothermic peak at  $270.08^\circ\text{C}$  with absorbed energy of  $31.74\text{ J/g}$  or  $2.47\text{ kJ/mol}$  and the total energy absorbed is  $231.79\text{ mJ}$ . The peak shows the transformation from  $\text{Al}(\text{OH})_3$  (bayerite) to  $\text{AlOOH}$  (boehmite) [11]. Transformation process is from  $\text{AlOOH}$  (boehmite) to  $\gamma\text{-Al}_2\text{O}_3$  occurs at  $550\text{--}800^\circ\text{C}$  [11] with second endothermic peak at  $660.28^\circ\text{C}$  with absorbed energy of  $2.99\text{ J/g}$  or  $0.23\text{ kJ/mol}$  and total of absorbed energy is  $21.89\text{ mJ}$ . At temperature above  $800^\circ\text{C}$  there is no mass loss of the sample that shows the stable  $\text{Al}_2\text{O}_3$  phase formation.

Theoretically, thermal decomposition process from  $\text{Al}(\text{OH})_3$  to  $\text{Al}_2\text{O}_3$  absorbs energy of  $173.61\text{ kJ/mol}$ , while from the characterization is  $2.71\text{ kJ/mol}$ . This is due to the impurity that exists in the synthesis result of  $\text{Al}(\text{OH})_3$ . In methane gas combustion, the released energy is  $802.36\text{ kJ/mol}$ . Some moles of  $\text{Al}(\text{OH})_3$  can absorb the energy released and retard the combustion from methane.

Thermal analysis of  $\text{Al}(\text{OH})_3$  decomposition using TGA-DSC instrument occurs endothermically. The  $\text{Al}(\text{OH})_3$  decomposition that absorbs energy will increase the fire retardation due to water release from  $\text{Al}(\text{OH})_3$  and liquidifies the flammable gas. The decomposition reaction of  $\text{Al}(\text{OH})_3$  is as the following [12]:



Beside that it also forms a thermally stable  $\text{Al}_2\text{O}_3$  layer on the the flammable gas.



#### 4. Conclusion

White precipitates with different masses were formed for electrolysis processes using aluminium anode with varied KCl solutions. From purity analysis using XRD found that precipitate of  $\text{Al}(\text{OH})_3$  was found in electrolysis using KCl 0.3 M, while  $\text{KAlOCl}_2$  was formed in the solution of KCl 0.45 M. The mixed compounds of  $\text{Al}(\text{OH})_3$  and  $\text{KAlOCl}_2$  were formed in other variations of KCl concentrations. Thermal analysis using TGA-DSC for  $\text{Al}(\text{OH})_3$  from the electrolysis using KCl 0.3 M solution shows reduced mass total of 45.49 % and two endothermic peaks at 270.08°C the transformation of  $\text{Al}(\text{OH})_3$  to  $\text{AlOOH}$  (boehmite) with absorbed energy of 2.47 kJ/mol, while at 660.28°C is the phase change of  $\text{AlOOH}$  (boehmite) to  $\gamma\text{-Al}_2\text{O}_3$  with absorbed energy of 0.23 kJ/mol. At temperature above 800°C there is no mass loss of  $\text{Al}(\text{OH})_3$  sample due to the formation of thermally stable phase of  $\text{Al}_2\text{O}_3$ .

#### References

- [1] Elbasuney S 2017 Novel multi-component flame retardant system based on nanoscopic aluminium-trihydroxide (ATH) *Powder Technol.* **305** 538-45
- [2] Woo S, Park J-H, Rhee C K, Lee J and Kim H 2012 Effect of thermal treatment on the aluminum hydroxide nanofibers synthesized by electrolysis of Al plates *Microelectron. Eng.* **89** 89-91
- [3] Tchomgui-Kamga E, Audebrand N and Darchen A 2013 Effect of co-existing ions during the preparation of alumina by electrolysis with aluminum soluble electrodes: structure and defluoridation activity of electro-synthesized adsorbents *J. Hazard. Mater.* **254** 125-33
- [4] Shalaby A, Nassef E, Mubark A and Hussein M 2014 Phosphate removal from wastewater by electrocoagulation using aluminium electrodes *Am. J. Environ. Eng. Sci.* **1** 5 90-8
- [5] Siskawati N, Widodo D S, Rahmanto W H and Suyati L 2018 Electrosynthesis of  $\alpha\text{-Fe}_2\text{O}_3$  in a  $\text{Fe}(\text{s})|\text{KCl}(\text{aq})||\text{H}_2\text{O}(\text{aq})|\text{C}(\text{s})$  System *J. Kim. Sains Apl.* **21** 4 182-6
- [6] Hidayah F F, Suyati L and Nuryanto R 2010 Efek KOH terhadap Rendemen Magnesium Hidroksida pada Elektrolisis Sistem  $\text{C}|\text{KOH}||\text{MgSO}_4, \text{KCl}|\text{C}$  *J. Kim. Sains Apl.* **13** 3 76-9
- [7] Yan H, Wu C and Wu Y 2015 Optimized process for separating NaOH from sodium aluminate solution: coupling of electro-dialysis and electro-electro-dialysis *Ind. Eng. Chem. Res.* **54** 6 1876-86
- [8] Svehla G 1990 *Buku Teks Analisis Anorganik Kualitatif Makro dan Semimikro* (Jakarta: PT, Kalman Media Pustaka)
- [9] Wernick S, Pinner R and Sheasby P G 1987 *Surface treatment and finishing of aluminum and its alloys*: ASM International)
- [10] MacDonald D D and Butler P 1973 The thermodynamics of the aluminium—water system at elevated temperatures *Corros. Sci.* **13** 4 259-74
- [11] Souza A D, Arruda C C, Fernandes L, Antunes M L, Kiyohara P K and Salomão R 2015 Characterization of aluminum hydroxide ( $\text{Al}(\text{OH})_3$ ) for use as a porogenic agent in castable ceramics *J. Eur. Ceram. Soc.* **35** 2 803-12
- [12] Lamouri S, Hamidouche M, Bouaouadja N, Belhouchet H, Gamier V, Fantozzi G and Trekkat J F 2017 Control of the  $\gamma$ -alumina to  $\alpha$ -alumina phase transformation for an optimized alumina densification *Bol. Soc. Esp. Ceram. V* **56** 2 47-54

# Electrosynthesis of Al(OH)<sub>3</sub> by Al(s)|KCl(aq)||KCl(s)|C(s) system

## ORIGINALITY REPORT

15%

SIMILARITY INDEX

14%

INTERNET SOURCES

7%

PUBLICATIONS

5%

STUDENT PAPERS

## PRIMARY SOURCES

1	<a href="http://jcc.undip.ac.id">jcc.undip.ac.id</a> Internet Source	4%
2	<a href="http://digilib.uinsby.ac.id">digilib.uinsby.ac.id</a> Internet Source	2%
3	<a href="http://sinta3.ristekdikti.go.id">sinta3.ristekdikti.go.id</a> Internet Source	2%
4	<a href="http://bmcchem.biomedcentral.com">bmcchem.biomedcentral.com</a> Internet Source	1%
5	<a href="http://www.uus8.org">www.uus8.org</a> Internet Source	1%
6	V Loganina, T Uchaeva. "Statistical assessment of damnification risk due to inconformity of paint coating quality", IOP Conference Series: Materials Science and Engineering, 2020 Publication	1%
7	<a href="http://pubs.rsc.org">pubs.rsc.org</a> Internet Source	<1%
8	<a href="http://sciencedocbox.com">sciencedocbox.com</a> Internet Source	<1%



---

9	Wang, Jiatai, Lin Ge, Zhaoqing Li, Lu Li, Qian Guo, and Jiangong Li. "Facile size-controlled synthesis of well-dispersed spherical amorphous alumina nanoparticles via homogeneous precipitation", <i>Ceramics International</i> , 2016. Publication	<1%
10	<a href="https://cnx.org">cnx.org</a> Internet Source	<1%
11	<a href="https://jpacr.ub.ac.id">jpacr.ub.ac.id</a> Internet Source	<1%
12	<a href="https://worldwidescience.org">worldwidescience.org</a> Internet Source	<1%
13	Z.-Y Deng, T Fukasawa, M Ando, G.-J Zhang, T Ohji. "Bulk alumina support with high tolerant strain and its reinforcing mechanisms", <i>Acta Materialia</i> , 2001 Publication	<1%
14	<a href="https://vibdoc.com">vibdoc.com</a> Internet Source	<1%
15	"Trends in Manufacturing and Engineering Management", Springer Science and Business Media LLC, 2021 Publication	<1%
16	<a href="https://silo.pub">silo.pub</a> Internet Source	<1%

---

Exclude quotes Off

Exclude matches Off

Exclude bibliography On