

# Numerical Investigation Of The Buckling Strength Behavior Of Ring Stiffened Submarine Pressure Hull

*by* Hartono Yudo

---

**Submission date:** 27-Sep-2019 10:23AM (UTC+0700)

**Submission ID:** 1181020320

**File name:** IJCIET\_08\_08\_041\_OK.pdf (758.23K)

**Word count:** 3379

**Character count:** 17654

3

**International Journal of Civil Engineering and Technology (IJCIET)**

Volume 8, Issue 8, August 2017, pp. 408–415, Article ID: IJCIET\_08\_08\_041

16 available online at <http://www.iaeme.com/ijciyet/issues.asp?JType=IJCIET&VType=8&IType=8>

ISSN Print: 0976-6308 and ISSN Online: 0976-6316

© IAEME Publication



Scopus Indexed

# NUMERICAL INVESTIGATION OF THE BUCKLING STRENGTH BEHAVIOR OF RING STIFFENED SUBMARINE PRESSURE HULL

**Hartono Yudo**

18

Naval Architecture Department, Engineering Faculty,  
Diponegoro University, Semarang, 50275, Indonesia**Aulia Windyandari**

15

Vocational Programs of Naval Architecture Department, Engineering Faculty,  
Diponegoro University, Semarang, 50275, Indonesia**Ahmad Fauzan Zakki**Naval Architecture Department, Engineering Faculty,  
Diponegoro University, Semarang, 50275, Indonesia

## ABSTRACT

A growing trend in the design of the submarine proves the need for increasing the level of water depth, especially for the military activities. Moreover, the complexity of modern submarines and their demand for efficiency, safety, and greater reliability, is a challenge for designers in making the design of submarine particular component known as pressure hull. The pressure hull is the main load-bearing structure in a naval submarine. The basic structural component is a ring-stiffened cylindrical metallic shell under an external hydrostatic pressure load. The ring-stiffeners forestall buckling of the shell until the material exhibits yielding, thereby making advantage of the full material strength and increasing the structural efficiency. The aim of the paper is to investigate the buckling strength behavior of ring stiffened submarine pressure hull. The influence of the bulkhead positions on the buckling strength behavior of the ring stiffened submarine pressure hull are presented and discussed.

**Key words:** Ring Stiffened Structure, Buckling Strength Behavior, and Submarine Pressure Hull.

**Cite this Article:** Hartono Yudo, Aulia Windyandari and Ahmad Fauzan Zakki, Numerical Investigation the Buckling Strength Behavior of Ring Stiffened Submarine Pressure Hull. International Journal of Civil Engineering and Technology, 8(8), 317, pp. 408–415.

<http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=8&IType=8>

## 1. INTRODUCTION

Indonesia's territorial sea is one of the most important checkpoints in the submarine world. Most of the global trade should pass through the Straits of Malacca and the shallow waters around the coast of the Indonesian archipelago. This situation makes Indonesia needs submarines that can operate at sea for up to three weeks. However Indonesia has only two old submarines Chakra, as well as some of the Frigate and Corvette to maintain a wide area. The presence of the modern submarine is absolutely necessary to strengthen the protection of the sea territory of Indonesia, especially at points that are considered vulnerable. A growing trend in the design of the submarine proves the need for increasing the level of water depth, especially for the military activities. Moreover, the complexity of modern submarines and their demand for efficiency, safety, and greater reliability, is a challenge for designers in making the design of submarine particular component known as pressure hull. Commonly, the structure of the submarine consists of two hull components, namely the outer hull which is more focused on the influence of the hydrodynamic loads so-called hydrodynamics hull, and the inner hull which is used to withstand hydrostatic pressure when the vessel in diving conditions. Based on the function<sup>8</sup> that the inner hull is used to withstand the pressure, thus it is identified as a pressure hull. Pressure hull is usually constructed using a combination of cylindrical shapes, conical and forms a dome. The design is intended to withstand the pressure created as a result of diving at a high level water depth. The increased pressure for any additions to depths of 100 feet which made the increased of hydrostatic pressure about 44.5 psi for sea water and 43.5 psi for freshwater, [1]. Weight submarine is depending on maximum diving depth: the deeper diving depth needs the bigger weight of submarine pressure hull. The level of diving depth that is used as a design consideration is categorized as: the operational diving depth / normal, the maximum allowable level of diving depth (maximum permitted depth) and the level of structural failure (collapse depth). The maximum allowable level of depth is the maximum depth level where the submarine is still safe to operate. The diving depth is only achieved on certain conditions. Collapse depth is the depth where the pressure hull structure has been failed. Instead of hydrostatics, submarines pressure hull should be able to withstand the harshness of shock explosion. Generally, collapse depth is a multiply factor between the safety factor and the operational diving depth (operating depth). In previous studies it has revealed that the value of the safety factor for submarines is ranged 1.5- 2.0, [1]. The safety standard is accepted in the practice of engineering. In a military submarine design, consideration of hydrostatic load at the level of the operational depth and the impact of the blast shock should be given. In conditions of war, the effects of the explosion shock can cause the structure to undergo large deformations, which can lead to material failure. The large size and distance of the explosion blast affecting the effects of underwater explosion shock. The explosion might produce a shock wave for 1 millisecond. The high intensity of the waves might cause damage to the pressure hull submarines and submarine equipment, [2]. Some research on the pressure hull has been done by several researchers, particularly regarding the analysis and design of submarine pressure hull. In 1991, Gorman and Louie [3] developed an optimization method to examine the material, shape and architecture of the pressure hull by considering the strength of the hull (hull yielding), buckling between frame, general instability and instability modes of failure at the local frame. In 1992, Jackson [4] presented the design concept of the submarine on which to base the planning process<sup>29</sup> submarines. Ross has been reviewing the pressure hull conventional and novel design [5-8]. Based on the finite element method and experiment, Ross proposed the improvement of efficiency dome structure with a dome to change the pressure hull submarine [7, 8]. In 1987, Ross introduced a design of axisymmetric pressure hull with swedge stiffened to withstand hydrostatic pressure. Comparison between swedge stiffened

with stiffened ring has also been carried out which terms swedge stiffened structure is more efficient than the conventional stiffened ring [9, 10]. In 1995, Ross presented the results of experiments to show the failure of thin walled plastic ring stiffened at cone shell, with uniform external pressure loads, [9]. Yuan also has presented a theoretical analysis of the elastic instability of the cylinder swedge stiffened against hydrostatic pressure loads, taking into account the influence of variation in the angle of the cone cross section, [10]. Lian<sup>21</sup> also did elastoplastic analysis and non-linear response of the swedge model Ross, [11]. In this paper, the study focused on the investigation of the buckling strength behavior of ring stiffened submarine pressure hull. The position of transverse bulkhead and the dimension of stiffener are determined as the influence parameters of the buckling strength performance of the ring stiffened submarine pressure hull. The linear buckling and elasto-plastic buckling is adopted for the numerical analysis.

## 2. MATERIAL AND METHOD

### 2.1. The Linear Buckling Analysis Formulations<sup>20</sup>

Thin structures subject to compression loads that haven't achieved the material strength limits can show a failure mode called buckling. Buckling is characterized by a sudden failure of a structural member subjected to high compressive stress, where the actual compressive stress at the point of failure is less than the ultimate compressive stresses that the material is capable of withstanding. In other words, once a critical load is reached<sup>6</sup>, the slender component draws aside instead of taking up additional load. This failure can be analyzed using a technique well known as linear buckling analysis. The goal of this analysis is to determine the buckling load factor,  $\lambda$ , and the critical<sup>23</sup> buckling load. The problem of linear buckling in finite element analysis is solved by first applying a reference level of loading [11-14],  $F_{ref}$  to the structure. This is ideally a unit load,  $F$ , that is applied. The unit load and respective constraints, Single Point Constraint (SPC), are referenced in the first load steps/subcase. A standard linear static analysis is then carried out to obtain stresses which are needed to form the geometric stiffness matrix  $K_G$ . The buckling loads are then calculated as part of the second load steps/subcase, by solving an eigenvalue problem:

$$(K - \lambda K_G) x = 0$$

$K$  is the stiffness matrix of the structure and  $\lambda$  is the multiplier to the reference load. The solution of the eigenvalue problem generally yields  $n$  eigenvalues  $\lambda$ , (buckling load factor) where  $n$  is the number of degrees<sup>14</sup> of freedom (in practice, only a subset of eigenvalues is usually calculated). The vector  $x$  is the eigenvector corresponding to the eigenvalue. The eigenvalue problem is solved using a matrix method. Not all eigenvalues are required. Only a small number of the lowest eigenvalues are normally calculated for buckling analysis. The lowest eigenvalue is associated with buckling. The critical or buckling load is:

$$F_{crit} = \lambda_{crit} F_{ref}$$

In other words,

$$\lambda_{crit} = F_{crit} / F_{ref}$$

thus

$$\lambda_c < 1 \text{ buckling}$$

$$\lambda_c > 1 \text{ safe}$$


It should be noted that the displacement results obtained with a buckling analysis depict the buckling mode shape. Any displacement values are meaningless. The same holds true for stress and strain results from a buckling analysis.


## 2.2. The Simulation Model and Calculations

The full models of ring stiffened pressure hull were used in FEA as shown in Fig. 2. The configuration of the ring stiffened pressure hull was defined as the variation of transverse bulkheads positions. The linear buckling calculations of ring stiffened pressure hull under hydrostatic pressure are performed. In this model, the hydrostatic pressure of the buckling load, which can be obtained by the water depth where the submarine might be operated as the operational condition and the maximum depth which is the structure still not collapse and reliable is introduced.


## 2.3. The Boundary Conditions and Loading Conditions

General purpose FE software is used for the linear buckling analysis in which the buckling mode shape is taken account. The quadrilateral 4 node element is used. The calculating pressure hulls consist of 4 models which is the variations of transverse bulkhead position is defined. The element number in the model is 4099 beam elements and 35753 shell elements are used to maintain the calculation accuracy. The convergence of calculation by mesh division was confirmed. The cylindrical coordinates were used. The boundary conditions are given at the mid span of the pressure hull at four points as shown in Fig. 1. The rigid body elements (RBE) are inserted at both transverse bulkheads in order to connect the center of bulkhead and the points on outer point of the circle as shown in Fig. 1. The hydrostatics pressure is loaded at the wall of the pressure hull. The rigid body elements (RBE) prevent the oval deformation of both transverse bulkheads, and keep the section in plane under translational and rotational deformation by the hydrostatics pressure. In the commercial software, a rigid link for either small deformation or large deformation can be implemented using RBE.

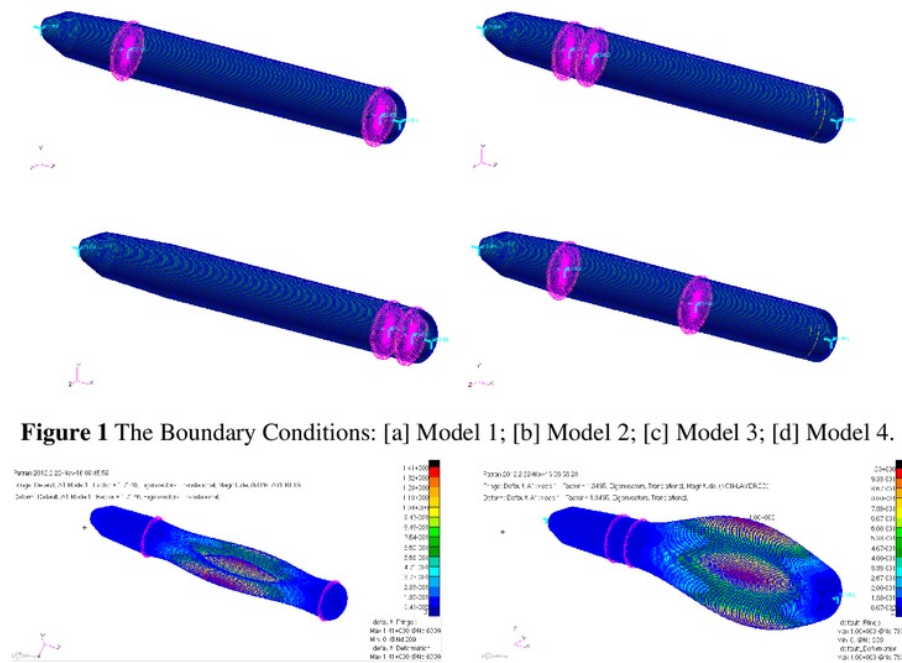


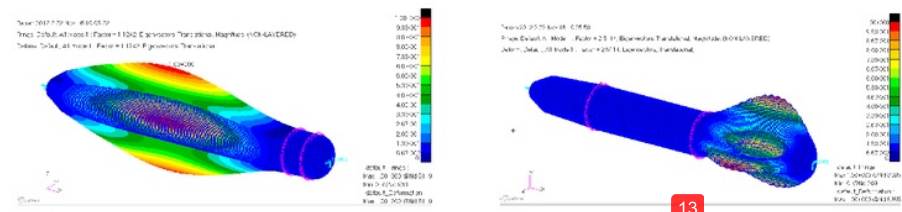

**Figure 2** 1<sup>st</sup> mode buckling mode shape: [a] model 1; [b] model 2; [c] model 3; [d] model 4

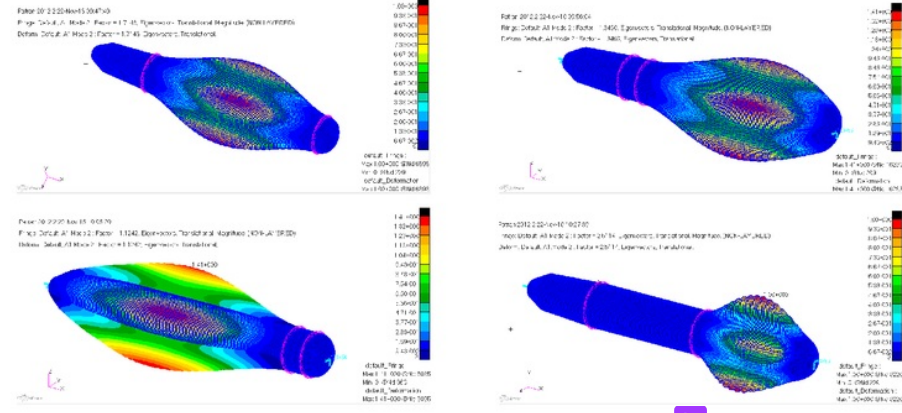

**Figure 3** 2<sup>nd</sup> mode buckling mode shape: [a] model 1; [b] model 2; [c] model 3; [d] model 4

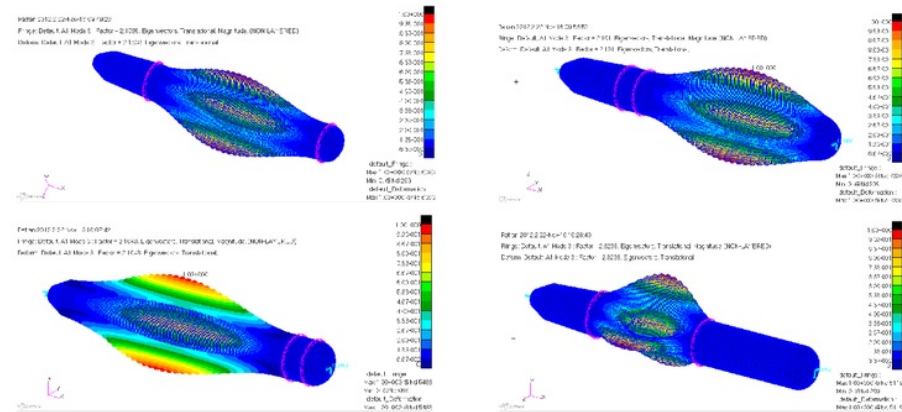

**Figure 4** 3<sup>rd</sup> mode buckling mode shape: [a] model 1; [b] model 2; [c] model 3; [d] model 4

## 4



## Figure



## Figure

## 3

25

T

**Table 1** Buckling Load Factor of the Ring Stiffened Pressure Hull

Pressure hull design	Mode	Buckling Load Factor	Acceptance Criteria	Status
Model 1	Mode 1	1.7146	1.5000	passed
	Mode 2	1.7146	1.5000	passed
	Mode 3	2.1538	1.5000	passed
	Mode 4	2.1538	1.5000	passed
	Mode 5	2.5591	1.5000	passed
Model 2	Mode 1	1.3465	1.5000	Not passed
	Mode 2	1.3465	1.5000	Not passed
	Mode 3	2.1010	1.5000	passed
	Mode 4	2.1010	1.5000	passed
	Mode 5	2.4468	1.5000	passed
Model 3	Mode 1	1.1242	1.5000	Not passed
	Mode 2	1.1242	1.5000	Not passed
	Mode 3	2.1043	1.5000	passed
	Mode 4	2.1043	1.5000	passed
	Mode 5	2.3583	1.5000	passed
Model 4	Mode 1	2.5114	1.5000	passed
	Mode 2	2.5114	1.5000	passed
	Mode 3	2.8238	1.5000	passed
	Mode 4	2.8238	1.5000	passed
	Mode 5	3.0560	1.5000	passed

Based on the analysis results, it appears that the configuration of the location of transverse bulkhead have influence the buckling strength of the pressure hull. It can be explained that the location of transverse bulkhead have increased the length of unsupported span on the pressure hull construction. The uniformly spacing transverse bulkheads have shown a better buckling strength compared than the non-uniform spacing bulkhead. The uniformly spacing transverse bulkheads was shown in Model 4, therefore the model 4 has the buckling strength pressure hull that able to withstand the load of 2.5114 times the applied load on the pressure hull. However at the model 3, the laying of transverse bulkheads that caused an increased on the length of unsupported span has shown the buckling strength that decreased on 1.1242 times of the applied load. The reduction of buckling strength in 3 models is 123% compared than the model 4. It might also cause the model 3 not meet the acceptance criteria which the buckling load factor of 1.5 is required.

**Table 2** The Conversion of Buckling Load Factor to the Submerge Depth

Pressure hull design	Buckling load factor on the 150m submerge depth	Safe submerge depth (1.50/buckling load factor)	Maximum submerge depth (1.0/buckling factor)
Model 1	1.7146	172 m	257 m
Model 2	1.3465	135 m	202 m
Model 3	1.1242	113 m	169 m
Model 4	2.5114	251 m	377 m

Buckling load factor that shows the stability limits of pressure hull structure might be converted into a submerge depth limit for the submarine. The maximum pressure load that is able to be supported by the pressure hull construction is converted using a hydrostatics pressure formula. The result of the conversion of maximum pressure to a maximum submerge depth can be seen in Table 2. Based on this conversion, it appears that model 4 is capable to

operate at a submerge depth of 251 m, while the model 3 has a safe submerge depth of 113m and a limit submerge depth of 169m.

#### 4. CONCLUSIONS

The ring stiffened submarine pressure hull was investigated as well as the configuration of influence parameters such as transverse bulkhead position was determined. Based on the results of numerical analysis, it is indicated that all of the configuration of the ring stiffened pressure hull design have excellent buckling strength. The smallest buckling load factor was shown in the scenario 3, with the load factor magnitude 1.12. The largest load factor was shown by the scenario 4 which is the transverse bulkheads was located at the middle part and the engine room bulkhead, with the load factor magnitude 2.511. Accordingly it might be concluded that the transverse bulkhead position have significant influence to the buckling strength of the submarine pressure hull. Although the numerical analyses have shown that buckling strength of the all of configurations of transverse bulkhead position was accepted. However the experiment should be made.

#### REFERENCES

- [1] Friedman N. Submarine design and development. London: Conway Maritime, 1984.
- [2] Keil AH. The response of ships to underwater explosions. Paper 7, Annual Meeting of the Society of Naval Architects and Marine Engineers, New York, 1961:366–410.
- [3] Gorman JJ, Louie LL. Submersible pressure hull design parametric. SNAME Trans, 1991; 99:119–146.
- [4] Jackson HA. Fundamentals of submarine concept design. SNAME Trans, 1992; 100: 419–448.
- [5] Ross CTF. Design of dome ends to withstand uniform external pressure. J Ship Res, 1987; 31:139–143. [6] Ross CTF. Collapse of inverted hemi-ellipsoidal shell domes under uniform pressure. J Ship Res, 1992; 36:378–386.
- [6] Ross CTF. A novel submarine pressure hull design pressure. J Ship Res, 1987; 31:186–188.
- [7] Ross CTF. General instability of swedge-stiffened circular cylinders
- [8] Ross CTF. Plastic collapse of thin-walled ring-stiffened conical shells under uniform external pressure. J Ship Res, 1995; 39:166–175.
- [9] Yuan KY, Liang CC, Ma YC. Investigation of the cone angle of a novel swedge-stiffened pressure hull. J Ship Res, 1991; 35:83–86.
- [10] Liang CC, Yang MF, Chen HW. Elastic-plastic axisymmetric failure of swedge-stiffened cylindrical pressure hull under external pressure. J Ship Res, 1993; 37:176–188.
- [11] Zakki, A.F., Bae, D.M., Susilo, S., Sipayung, E.A., Suharto. Structure design and characteristic analysis of buckling strength on swedge frame pressure hull with finite element analysis. ARPN J Appl Sci, 2017: 821-833.
- [12] Chrismianto, D., Zakki, A.F., Arswendo, B., Kim, D.J. submarine hull form design to optimize hull resistance using CFD. J. Marine. Sci. Appl. (2015) 14: 399-405.
- [13] Prabowo, A. R., Bae, D. M., Sohn, J. M., Zakki, A. F., Cao, B., & Cho, J. H. Effects of the rebounding of a striking ship on structural crashworthiness during ship-ship collision. Thin-Walled Structures, (2017) 115, 225-239.
- [14] Prabowo, A.P., Bae, D.-M., Sohn, J.-M., Zakki, A.F. Evaluating the parameter influence in the event of a ship collision based on the finite element method approach. Int J Tech, 2015, 4: 592-602.
- [15] Mojeswara Rao Duduku, Kavuri Lakshmi Narayana, Kavuluri Venkata Ramana and Chintalapati Sridhar Yesaswi, Development of an Expert System for Condition Monitoring of Submarines Using IR Thermography, International Journal of Mechanical Engineering and Technology, 8(4), 2017, pp. 26–33

# Numerical Investigation Of The Buckling Strength Behavior Of Ring Stiffened Submarine Pressure Hull

## ORIGINALITY REPORT

17%

SIMILARITY INDEX

8%

INTERNET SOURCES

9%

PUBLICATIONS

9%

STUDENT PAPERS

## PRIMARY SOURCES

1

issuu.com

Internet Source

1%

2

Submitted to Santa Fe Community College

Student Paper

1%

3

hobbydocbox.com

Internet Source

1%

4

Quang-Viet Vu, George Papazafeiropoulos, Carlos Graciano, Seung-Eock Kim. "Optimum linear buckling analysis of longitudinally multi-stiffened steel plates subjected to combined bending and shear", Thin-Walled Structures, 2019

Publication

1%

5

Submitted to University of Portsmouth

Student Paper

1%

6

Submitted to University of Mustansiriyah

Student Paper

1%

7

Georgios I. Giannopoulos. "Elastic buckling and

flexural rigidity of graphene nanoribbons by using a unique translational spring element per interatomic interaction", Computational Materials Science, 2012

Publication

1%

8

John R. MacKay, Fred van Keulen, Malcolm J. Smith. "Quantifying the accuracy of numerical collapse predictions for the design of submarine pressure hulls", Thin-Walled Structures, 2011

Publication

1%

9

Submitted to University Tun Hussein Onn Malaysia

Student Paper

1%

10

MacKay, J, M Smith, N Pegg, and F van Keulen. "Collapse mechanics in externally loaded pressure vessels with simulated corrosion damage", Shell Structures Theory and Applications (Vol 2) Proceedings of the 9th SSTA Conference Jurata Poland 14-16 October 2009, 2009.

Publication

1%

11

[www.tandfonline.com](http://www.tandfonline.com)

Internet Source

1%

12

[iraj.in](http://iraj.in)

Internet Source

1%

13

Submitted to University of Leeds

Student Paper

1%

- 
- |    |  |     |
|----|--|-----|
| 14 | <p>Stelios K. Georgantzinis, G. I. Giannopoulos, P. K. Pierou, N. K. Anifantis. "Numerical stability analysis of imperfect single-walled carbon nanotubes under axial compressive loads", International Journal of Structural Integrity, 2015</p> <p>Publication</p> | 1 % |
|----|--|-----|
- 
- |    |  |     |
|----|--|-----|
| 15 | <p><a href="http://media.neliti.com">media.neliti.com</a></p> <p>Internet Source</p> | 1 % |
|----|--|-----|
- 
- |    |  |      |
|----|--|------|
| 16 | <p><a href="http://www.muc.edu.iq">www.muc.edu.iq</a></p> <p>Internet Source</p> | <1 % |
|----|--|------|
- 
- |    |  |      |
|----|--|------|
| 17 | <p>Elsayed Fathallah, Hui Qi, Lili Tong, Mahmoud Helal. "Design Optimization of Composite Elliptical Deep-Submersible Pressure Hull for Minimizing the Buoyancy Factor", Advances in Mechanical Engineering, 2015</p> <p>Publication</p> | <1 % |
|----|--|------|
- 
- |    |  |      |
|----|--|------|
| 18 | <p>Aulia Windyandari, Gunawan Dwi Haryadi, Suharto Suharto, Insanu Abdilla Cendekia Abar. "Numerical Estimation of Glass Fiber Reinforced Plastic Propeller Performance Using Rigid and Flexible Model", International Review of Mechanical Engineering (IREME), 2019</p> <p>Publication</p> | <1 % |
|----|--|------|
- 
- |    |  |      |
|----|--|------|
| 19 | <p><a href="http://www.iaescore.com">www.iaescore.com</a></p> <p>Internet Source</p> | <1 % |
|----|--|------|
- 

Submitted to Engineers Australia

21

Ahmad Fauzan Zakki, Aris Triwiyatno, Bandi Sasmito, Krismon Budiono. "Design and Control of Autonomous Surface Vehicle to Support Bathymetry Survey in the Coastal Environment", *Advances in Science, Technology and Engineering Systems Journal*, 2019

Publication

&lt;1 %

22

Ruitao Niu, Weicheng Gao, Wei Liu. "Effect of moment of inertia on elastic stability of rectangular webs for thin-walled beams under a transverse load", *Thin-Walled Structures*, 2014

Publication

&lt;1 %

23

Kim, K.D.. "A 4-node co-rotational ANS shell element for laminated composite structures", *Composite Structures*, 200709

Publication

&lt;1 %

24

Istirokhatun, Titik, Nur Rokhati, Richa Rachmawaty, Metty Meriyani, Slamet Priyanto, and Heru Susanto. "Cellulose Isolation from Tropical Water Hyacinth for Membrane Preparation", *Procedia Environmental Sciences*, 2015.

Publication

&lt;1 %

25

[ejournal-s1.undip.ac.id](http://ejournal-s1.undip.ac.id)

Internet Source

&lt;1 %

26	<a href="https://ntrs.nasa.gov">ntrs.nasa.gov</a> Internet Source	<1 %
27	<a href="https://publications.nr.no">publications.nr.no</a> Internet Source	<1 %
28	<a href="https://www.scielo.br">www.scielo.br</a> Internet Source	<1 %
29	<a href="https://trid.trb.org">trid.trb.org</a> Internet Source	<1 %
30	Aditya Rio Prabowo, Seung Jun Baek, Jung Hoon Byeon, Dong Myung Bae, Joung Hyung Cho, Jung Min Sohn. "Investigation on the Structural Damage of a Double-Hull Ship, Part I – Ship Collision", Procedia Structural Integrity, 2017 Publication	<1 %

Exclude quotes Off  
Exclude bibliography On

Exclude matches Off