

Lampiran Korespondensi Proses Submit Publikasi Nasional Terakreditasi

Judul Makalah : Average Based-FTS Markov Chain With Modifications to the Frequency
Density Partition to Predict COVID-19 in Central Java
Nama Jurnal : CAUCHY –Jurnal Matematika Murni dan Aplikasi
Reputasi : Terindeks Sinta 2

No.	Item	Tanggal	Halaman
1	[Ca] Submission Acknowledgement	18 September 2021	1
2	Response from Editor #1 ; [Ca] Editor Decision	20 Desember 2021	2
3	Response from Editor #2 ; Article Processing Charge (APC)	24 Desember 2021	2
4	Response from Editor #3 ; Letter of Acceptance (LoA) dan Kuitansi Pembayaran Publikasi Naskah	28 Desember 2021	3
5	Response from Editor #4 ; [Ca] Copyediting Review Request	24 Februari 2022	5
6	Response from Editor #5 ; [Ca] Proofreading Acknowledgement (Author)	05 Maret 2022	6

Proses Korespondensi disajikan berikut ini :

1. [Ca] Submission Acknowledgement
Sabtu, 18 September 2021, 01.04 WIB

Juhari, M.Si <ejournal@uin-malang.ac.id>
Kepada : Susilo Hariyanto

Dear Susilo Hariyanto :

Thank you for submitting the manuscript, "Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java" to CAUCHY. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Manuscript URL:

<https://ejournal.uin-malang.ac.id/index.php/Math/author/submission/13371>

Username: zaenurrohman

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Juhari, M.Si
CAUCHY

2. Response from Editor #1 ; [Ca] Editor Decision
Senin, 20 Desember 2021m 10.47 WIB

Juhari, M.Si <ejournal@uin-malang.ac.id>
Kepada : Susilo Hariyanto

Dear Susilo Hariyanto :
We have reached a decision regarding your submission to CAUCHY, "Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java".

Our decision is to: Revision Required (Log in to account journal)

Juhari Juhari
Universitas Islam Negeri Maulana Malik Ibrahim Malang
Phone 081336397956
muhammadroziqinlina@gmail.com

CAUCHY

CAUCHY : Jurnal Matematika Murni dan Aplikasi
<http://ejournal.uin-malang.ac.id/index.php/math>

3. Response from Editor #2 ; Artcle Processing Charger (APC)
Jumat, 24 Desember 2021, 09.39 WIB

Juhari, M.Si <ejournal@uin-malang.ac.id>
Kepada : Susilo Hariyanto

Dear Author,
Diberitahukan bahwa naskah Bapak/Ibu yang sudah di submit sebelumnya sudah dinyatakan accepted oleh tim reviewer dan editor, saat ini sudah memasuki tahap Copyediting yang selanjutnya akan di Layout, dan terakhir dibutuhkan Proofreading. Surat Accepted (LoA) akan kami kirimkan jika sudah menyelesaikan proses administrasi jurnal. Atas perhatian dan kerjasama disampaikan terima kasih.

Berikut link ketentuan administrasi publikasi naskah (Article Processing Charge):

<http://ejournal.uin-malang.ac.id/index.php/Math/pages/view/Article%20Fees>

*) Mohon bukti administrasi jurnal dikirmkan via wa di no:+62 81336397956

Sincerely,
Admin Jurnal
CAUCHY: Jurnal Matematika Murni dan Aplikasi

CAUCHY : Jurnal Matematika Murni dan Aplikasi
<http://ejournal.uin-malang.ac.id/index.php/math>

Dear Author,

Diberitahukan bahwa naskah Bapak/Ibu yang sudah di submit sebelumnya sudah dinyatakan accepted oleh tim reviewer dan editor, saat ini sudah memasuki tahap **Copyediting** yang selanjutnya akan di **Layout**, dan terakhir dibutuhkan **Proofreading**. Surat Accepted akan kami kirimkan jika sudah menyelesaikan proses administrasi jurnal. Atas perhatian dan kerjasama disampaikan terima kasih.

Berikut link ketentuan administrasi publikasi naskah (Article Processing Charge):

<http://ejournal.uin-malang.ac.id/index.php/Math/pages/view/Article%20Fees>

*) Mohon bukti administrasi jurnal dikirmkan via wa di no:+62 81336397956

Sincerely,

CAUCHY
Jurnal Matematika Murni dan Aplikasi

Admin

CAUCHY: Jurnal Matematika Murni dan Aplikasi

4. Response from Editor #3 ; Letter of Acceptance (LoA) dan Kuitansi Pembayaran Publikasi Naskah
Selasa, 28 Desember 2021, 09.05 WIB

Juhari, M.Si <ejournal@uin-malang.ac.id>

Kepada : Susilo Hariyanto

Dear Author,

Berikut kami sampaikan Letter of Acceptance (LoA) dan Kuitansi Pembayaran Publikasi Naskah yang akan diagendakan publish pada Volume 7, Issue 2, May 2022

Tim Editor

CAUCHY : Jurnal Matematika Murni dan Aplikasi

<http://ejournal.uin-malang.ac.id/index.php/math>



Malang, December 28, 2021

Dear Susilo Hariyanto, Zaenurrohman Zaenurrohman, Titi Udjiani SRRM

Thank you very much for submitting your paper, entitled:

“Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java“

Your paper is scheduled to appear in:

CAUCHY: Jurnal Matematika Murni dan Aplikasi, Vol.7 No.2 Edition May 2022

which is expected to be published within about three months. By that time the paper-reprints will be sent to you by registered airmail as well as you will be provided with the final e-file of your paper by e-mail.

Your paper will be published online as a forthcoming paper at the web site of CAUCHY at:

<http://ejournal.uin-malang.ac.id/index.php/Math>

Thank you very much for choosing CAUCHY as publication media.

Sincerely,

The image shows a handwritten signature in blue ink that reads "Juhari". To the right of the signature is the CAUCHY logo, which includes the Greek letter chi (χ) and the word "CAUCHY" in a purple, serif font. Below the logo, the text "Jurnal Matematika Murni dan Aplikasi" is written in a smaller, red, sans-serif font.

Juhari, M.Si
Journal Manager of
CAUCHY: Jurnal Matematika Murni dan Aplikasi



NO. 4

KUITANSI

Telah terima dari : Susilo Hariyanto

Uang sejumlah : Satu Juta Enam Ratus Lima Ribu Tujuh Ratus Delapan Puluh Rupiah

Untuk Pembayaran : Pembayaran publikasi naskah yang berjudul " Optimal control and cost-effectiveness analysis in an epidemic model with viral mutation and vaccine intervention "

Rp 1.605.780

Malang, 28 Desember 2021


CAUCHY
Jurnal Matematika Murni dan Aplikasi
(Admin jurnal)

5. Response from Editor #4 ; [Ca] Copyediting Review Request
Kamis, 24 Februari 2022, 09.36 WIB

Juhari, M.Si <ejournal@uin-malang.ac.id>
Kepada : Susilo Hariyanto

Susilo Hariyanto :

Your submission "Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java" for CAUCHY has been through the first step of copyediting, and is available for you to review by following these steps.

1. Click on the Submission URL below.
2. Log into the journal and click on the File that appears in Step 1.
3. Open the downloaded submission.
4. Review the text, including copyediting proposals and Author Queries.
5. Make any copyediting changes that would further improve the text.
6. When completed, upload the file in Step 2.
7. Click on METADATA to check indexing information for completeness and accuracy.
8. Send the COMPLETE email to the editor and copyeditor.

Submission URL:

<https://ejournal.uin-malang.ac.id/index.php/Math/author/submissionEditing/13371>

Username: zaenurrohman

This is the last opportunity to make substantial copyediting changes to the submission. The proofreading stage, that follows the preparation of the galleys, is restricted to correcting typographical and layout errors.

If you are unable to undertake this work at this time or have any questions, please contact me. Thank you for your contribution to this journal.

Juhari Juhari
Universitas Islam Negeri Maulana Malik Ibrahim Malang
Phone 081336397956
muhammadroziqinlina@gmail.com
CAUCHY

CAUCHY : Jurnal Matematika Murni dan Aplikasi
<http://ejournal.uin-malang.ac.id/index.php/math>

6. Response from Editor #5 ; [Ca] Proofreading Acknowledgement (Author)
Sabtu, 05 Maret 2022, 08.51 WIB


Juhari, M.Si <ejournal@uin-malang.ac.id>
Kepada : Susilo Hariyanto

Susilo Hariyanto :
Thank you for proofreading the galleys for your manuscript, "Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java," in CAUCHY. We are looking forward to publishing your work shortly.

If you subscribe to our notification service, you will receive an email of the Table of Contents as soon as it is published. If you have any questions, please contact me.

Juhari Juhari
Universitas Islam Negeri Maulana Malik Ibrahim Malang
Phone 081336397956
muhammadroziqinlina@gmail.com
CAUCHY

CAUCHY : Jurnal Matematika Murni dan Aplikasi
<http://ejournal.uin-malang.ac.id/index.php/math>



CAUCHY
Jurnal matematika Murni dan Aplikasi

Home > User > Author > Submissions > #1

SUMMARY
REVIEW
EDITING

SUBMISSION

Authors: Susilo Hariyanto, Zaenurrohman Zaenurrohman, Titi Udjani SRRM

Title: Average Based-FTS Markov Chain Based on a Modified Frequency Density f 19 in Central Java

Section: Articles

Editor: Hawzah Saadati

PEER REVIEW

ROUND 1

Review Version: 13371-37065-1-RV.DOCX 2021-09-18

Initiated: 2021-11-20

Last modified: 2021-12-20

Uploaded file: Reviewer B 13371-40390-1-RV.DOCX 2021-12-20
Reviewer A 13371-39760-1-RV.DOCX 2021-12-08

EDITOR DECISION

Decision: Accept Submission 2021-12-21

Notify Editor: Editor/Author Email Record 2021-12-20

Editor Version: None

Author Version: 13371-40472-1-ED.DOCX 2021-12-21

Upload Author Version: Tidak ada file yang dipilih

Editorial Office

Mathematics Department.

Home > User > Author > Submissions > #13371 > Editing

SUMMARY
REVIEW
EDITING

SUBMISSION

Authors: Susilo Hariyanto, Zaenurrohman Zaenurrohman, Titi Udjani SRRM

Title: Average Based-FTS Markov Chain Based on a Modified Frequency Density Partitioning to Predict COVID-19 in Central Java

Section: Articles

Editor: Hawzah Saadati

COPYEDITING

REVIEW METADATA	REQUEST	UNDERWAY	COMPLETE
1. Initial Copyedit File: 13371-40491-1-CE.DOCX 2021-12-21	2022-01-17	—	2022-01-17
2. Author Copyedit File: 13371-40491-3-CE.DOCX 2022-02-25 <input type="button" value="Pilih File"/> Tidak ada file yang dipilih <input type="button" value="Upload"/>	2022-02-24	2022-02-25	2022-03-02
3. Final Copyedit File: 13371-40491-4-CE.DOCX 2022-03-02	2022-03-02	—	2022-03-02

Copyedit Comments: No Comments

LAYOUT

Galley Format	FILE	
1. PDF - VIEW PROOF	13371-43159-1-PB.PDF 2022-03-05	207

Supplementary Files: FILE
None

Layout Comments: No Comments

PROOFREADING

REVIEW METADATA	REQUEST	UNDERWAY	COMPLETE
1. Author	2022-03-02	2022-03-02	2022-03-02
2. Proofreader	2022-03-05	—	2022-03-05
3. Layout Editor	2022-03-05	—	2022-03-05

Proofreading Corrections: No Comments

Editorial Office

Mathematics Department,
Universitas Islam Negeri Maulana Malik Ibrahim Malang
Gajayana Street 50 Malang, East Java, Indonesia 65144



Average Based-FTS Markov Chain With Modifications to the Frequency Density Partition to Predict COVID-19 in Central Java

Susilo Hariyanto*, Zaenurrohman, Titi Udjiani SRRM

Department of Mathematics, Faculty Science and Mathematics, Diponegoro University,
Indonesia

*Corresponding Author

Email: susilohariyanto@lecturer.undip.ac.id*,
zaenurrohman8.zr@gmail.com,
udjianititi@yahoo.com

ABSTRACT

Every day, new Covid-19 positive cases are discovered in Central Java. Many research has used various methodologies to try to forecast new positive instances. The fuzzy time series (FTS) approach is one of them. Many FTS are now in development, including the FTS Markov Chain. The duration of the gap in the FTS must be determined carefully because it will affect the FLR, which will be used to estimate the forecast value. The average-based method can be used to determine the optimum interval length; however, other research use frequency density partitioning to determine the optimal interval length in order to produce superior predicting values. The goal of this research is to improve the accuracy of forecasting values by modifying the frequency density partition on the average based-FTS Markov Chain. The approach utilized is average-based, with the length of the interval determined by the average, the forecast value determined by the FTS Markov Chain, and the frequency density partition modified to provide the ideal interval. The average-based FTS Markov Chain approach with adjustments to the frequency density partition achieves an accuracy rate of 89.3 percent, according to the findings of this study. Because changes to the frequency density partition can produce a good level of accuracy in forecasting new positive cases of Covid-19 in Central Java, it is hoped that this modification of the frequency density partition on the average-based FTS Markov chain can be used as a model for forecasting in fields other than new positive cases. Covid-19.

Keywords: Average Based; FTS Markov Chain; Modified frequency density partitioning; COVID19; MAPE

INTRODUCTION

COVID-19 first appeared in the city of Wuhan, Hubei Province, China, which spread almost all over the world, including Indonesia. At the beginning of 2020, Indonesia experienced a COVID-19 pandemic, which, to this day, new positive cases are still being found[1]. The government is still thinking about how to make Indonesia free from COVID-19.

Many experts have estimated the amount of new Covid-19 positive cases in Indonesia. Forecasting is the process of predicting what will happen in the future over a lengthy period of time[2]. However, no approach for accurately forecasting anything,

including new Covid-19 positive cases, has been developed to yet. The fuzzy time series (FTS) is one of the forecasting approaches for determining the number of new positive cases in Indonesia. The concept of fuzzy logic is used in the forecasting of FTS. Song and Chissom introduced the FTS in 1993[3], and it has since been widely developed, including the Markov method[4], Chen's method[5], Chen and Hsu's method[6], the weighted method[7], the multiple-attribute fuzzy time series method[8], the percentage change method[9], and Markov chain method[10].

Ruey Chyn Tsaur, developing fuzzy time series by merging the fuzzy time series method with the Markov chain concept [10]. Markov chain is a stochastic process in which future events only depend on today's events. Markov chain is used in the defuzzification process [11].

The determination of the length of the interval in the fuzzy time series does not have a definite formula, but the determination of the length of the interval in the fuzzy time series is based on the researcher. As a result, even if each researcher is utilizing the same data, the length of the interval will vary[3]. Even though the determination of the length of the interval is a very influential part in the formation of a fuzzy logical relationship (FLR).[12]. One method that can be used to determine the length of the interval is the average based. This average based uses an average-based method in determining the length of the interval [12].

Chen and Hsu in 2004 also developed a fuzzy time series. Chen and Hsu developed fuzzy time series by repartitioning based on frequency density. Chen and Hsu's frequency density repartitioning algorithm divides the interval with the highest frequency density into four sub-intervals, the interval with the second highest density into three sub-intervals, the interval with the third highest density into two sub-intervals, and the interval with the lowest density into one sub-interval.[6][13].

Based on the description above, the researcher is interested in modifying the frequency density partitioning algorithm used by Chen and Hsu, namely by exchanging the partition between the interval with the first densest frequency with the third densest interval, which was originally the first densest interval partitioned into 4 sub-intervals, the researcher changed the first densest was partitioned into 2 sub-intervals, and for the interval with the third densest frequency initially partitioned into 2 sub-intervals the researcher changed it to 4 sub-intervals.

Furthermore, the researcher will use the average-based method to determine the interval length in the fuzzy time series type Markov chain, and apply it to forecasting new positive cases of COVID-19 in Central Java.

METHODS

Fuzzy Time Series

The definition of fuzzy time series was first introduced by Song dan Chisom (1993). Let U universe of discourse, with $U = \{u_1, u_2, \dots, u_n\}$ on a fuzzy set A_i , defined as[3]:

$$A_i = \frac{f_A(u_1)}{u_1} + \frac{f_A(u_2)}{u_2} + \dots + \frac{f_A(u_n)}{u_n} \quad (1)$$

where f_A is the membership of the fuzzy set A_i and u_k is an element of the fuzzy set A_i and $f_A(u_k)$ shows the degree of membership of u_k in A_i where $k = 1, 2, 3, \dots, n$.

Definition. If $F(t)$ is caused by $F(t - 1)$, then the relation in the first order model $F(t)$ can be stated as follows: [5].

$$F(t) = F(t - 1) \circ R(t, t - 1) \tag{2}$$

where “ \circ ” is Max-Min composition operator, and $R(t, t - 1)$ is a relation matrix to describe the fuzzy relationship between $F(t - 1)$ dan $F(t)$.

Average-Based

Average based is an algorithm that can be used to set the interval length that is determined at the initial stage of forecasting when using fuzzy time series. The steps of the average based algorithm are as follows [12], [14]:

- a. Determine the absolute difference (lag) between data $n + 1$ and data n with the formula:

$$lagD_n = |(Data\ n + 1) - (Data\ n)| \tag{3}$$

- b. Determine the length of the interval

$$length\ of\ interval = \left(\frac{total\ lag}{numbers\ of\ data} \right) : 2 \tag{4}$$

- c. Determine the basis value of the interval length according to Table 1. Following:

Table 1. Basis Mapping Table

Range	Basis
0,1 - 1,0	0,1
1,1 -10	1
11-100	10
101-1000	100

- d. The length of the interval is then rounded up according to the interval basis table.

Modification Frequency Density Partition

In this study, modifications to the frequency density partition were used, the algorithm used is as follows:

- a. The interval with the first densest frequency is divided into 2 subintervals.
- b. The interval with the second densest frequency is divided into 3 subintervals.
- c. The interval with the third densest frequency is divided into 4 subintervals
- d. Eliminates intervals that have no frequency.

Fuzzy Time Series Markov Chain

Markov Chain's Fuzzy Time Series forecasting procedure is as follows[10]:

Step 1. Collecting historical data (Yt).

Step 2. Defines the U universe set of data, with D_1 and D_2 being the corresponding positive numbers.

$$U = [D_{min} - D_1, D_{max} + D_2] \tag{5}$$

Step 3. Specify the number of fuzzy intervals.

Step 4. Defining the fuzzy set in the universe of discourse U, the Fuzzy A_i set declares the linguistic variable of the share price by $1 \leq i \leq n$.

Step 5. Fuzzification of historical data. If a time series data is included in the u_i interval, then that data is fuzzification into A_i .

Step 6. Specifies fuzzy logical relationship (FLR) and Fuzzy Logical Relationships Group (FLRG).

Step 7. Calculate forecasting results

For time series data, using FLRG, a probability can be obtained from a state heading to the next state. In order to calculate the predicting value, a Markov probability transition matrix with a dimension of $n \times n$ was used. If

state A_i transition to a state A_j and pass the state $A_k, i, j = 1, 2, \dots, n$, then we can obtain FLRG. The transition probability formula is as follows:

$$P_{ij} = \frac{M_{ij}}{M_i}, i, j = 1, 2, \dots, n \quad (6)$$

with:

P_{ij} = probability of transition from state A_i to state A_j one step

M_{ij} = number of transitions from state A_i to state A_j one step

M_i = the amount of data included in the A_i

The probability matrix R of all states can be written as follows:

$$R = \begin{bmatrix} P_{11} & \dots & P_{1n} \\ \vdots & \ddots & \vdots \\ P_{n1} & \dots & P_{nn} \end{bmatrix} \quad (7)$$

Matrix R reflects the transition of the entire system. If $F(t - 1) = A_i$, then the process will be defined in the A_i at the time of $(t - 1)$, then the forecasting results $F(t)$ will be calculated using the $[P_{i1}, P_{i2}, \dots, P_{in}]$ on the matrix R. Forecasting results $F(t)$ is the weighted average value of the m_1, m_2, \dots, m_n (midpoint of u_1, u_2, \dots, u_n). The forecasting output result value on $F(t)$ can be determined by using the following rules:

Rule 1: if fuzzy logical relationship group A_i is *one-to-one* (suppose $A_i \rightarrow A_k$ where $P_{ik} = 1$ and $P_{ij} = 0, j \neq k$) then the forecasting value of $F(t)$ is m_k the middle value of the u_k .

$$F(t) = m_k P_{ik} = m_k \quad (8)$$

Rule 2: if the FLRG A_i is *one-to-many* (e.g. $A_j \rightarrow A_1, A_2, \dots, A_n, j = 1, 2, \dots, n$), when $Y(t - 1)$ at time $(t - 1)$ is included in state A_j then the forecasting $F(t)$, is:

$$F(t) = m_1 P_{j1} + m_2 P_{j2} + \dots + m_{j-1} P_{j(j-1)} + Y(t - 1) P_{jj} + m_{j+1} P_{j(j+1)} + \dots + m_n P_{jn} \quad (9)$$

where $m_1, m_2, \dots, m_{j-1}, m_{j+1}, \dots, m_n$ is the middle value $u_1, u_2, \dots, u_{j-1}, u_{j+1}, \dots, u_n$, and $Y(t - 1)$ are state values A_j at time $t - 1$.

Rule 3: if the FLRG A_i is empty ($A_i \rightarrow \emptyset$) forecast value $F(t)$ is m_i which is the middle value of u_i with the following equation:

$$F(t) = m_i \quad (10)$$

Step 8. Adjusting the trend of forecasting values with the following rules:

- If state A_i communicates with A_i , starting from state A_i at time $t - 1$ expressed as $F(t - 1) = A_i$, and undergoing an increasing transition to state A_j at the time t where $(i < j)$, then the adjustment value is:

$$D_{t1} = \left(\frac{l}{2}\right) \quad (11)$$

where l is the basis interval.

- If state A_i communicates with A_i , starting from state A_i at the time $t - 1$ expressed as $F(t - 1) = A_i$, and experiencing a decreasing transition to state A_j at the time t where $(i > j)$ the adjustment value is:

$$D_{t1} = -\left(\frac{l}{2}\right) \quad (12)$$

- If state A_i at the time $t - 1$ is expressed $F(t - 1) = A_i$, and undergoes a jump forward transition to state A_{i+s} at the time t where $(1 \leq s \leq n - i)$ then the adjustment value is:

$$D_{t2} = \left(\frac{l}{2}\right)s \quad (13)$$

where s is the number of forward jumps.

- If state A_i at the time $t - 1$ is as $F(t - 1) = A_i$, and undergoes a jump-backward transition to state A_{i-v} at the time t where $(1 \leq v \leq i)$ then the adjustment value is:

$$D_{t2} = -\left(\frac{l}{2}\right)v \quad (14)$$

where v is the number of jumps backward.

Step 9. Determine the final forecast value based on the adjustment of the trend of the forecasting value

If FLRG A_i is one-to-many and state A_{i+1} can be accessed from state A_i where state A_i is related to A_i then the forecasting result becomes $F'(t) = F(t) + D_{t1} + D_{t2} = F(t) + \left(\frac{l}{2}\right) + \left(\frac{l}{2}\right)$. If FLRG A_i is one-too-many and state A_{i+1} can be accessed from A_i where state A_i is not related to A_i then the forecasting values becomes $F'(t) = F(t) + D_{t2} = F(t) + \left(\frac{l}{2}\right)$. If FLRG A_i is one to many and state A_{i-2} can be accessed from state A_i where A_i is not related to A_i then the forecasting result is $F'(t) = F(t) - D_{t2} = F(t) - \left(\frac{l}{2}\right) \times 2 = F(t) - l$. If v is jump step, the general form of the forecast is:

$$F'(t) = F(t) \pm D_{t1} \pm D_{t2} = F(t) \pm \left(\frac{l}{2}\right) \pm \left(\frac{l}{2}\right)v. \quad (15)$$

Forecasting Error Measurement

The reliability of a forecast can be determined by looking at mean average percentage error (MAPE), this MAPE formulas[15]:

$$MAPE = \frac{1}{n} \sum_{t=1}^n \frac{|Y(t) - F'(t)|}{Y(t)} \times 100\% \quad (16)$$

with Y_t : actual data period t , F'_t : t period forecasting value, and n : the predictable amount of data.

RESULTS AND DISCUSSION

Forecasting with an average based-FTS Markov Chain with modified frequency density partitioning, the first step is to collect COVID-19 in the Central Java period June 25, 2021 until August 20, 2021 as a universe discourse (U). Next, determine the greatest value ($D_{max} = 5655$) and smallest values ($D_{min} = 1428$), and the value of $D_1 = 8$ and $D_2 = 5$, so it can be defined $U = [1428 - 8, 5655 + 5] = [1420, 5660]$. Then, calculate the absolute difference from historical data, the average absolute difference from 57 data points is 658,554, which is then divided by 2 to yield 329,277. The value of 329,277 is then determined using Table 1. The basis of the length of the interval is 100, so that U can be partitioned into the same interval length, namely $u_1, u_2, u_3, u_4, u_5, \dots, u_{39}, u_{40}, u_{41}, u_{42}, u_{43}$ successively the value for each interval is

Table 2. Universe Discourse of New Positive Cases of Covid-19

$u_1 = [1420, 1520]$	⋮
$u_2 = [1520, 1620]$	$u_{41} = [5420, 5520]$
$u_3 = [1620, 1720]$	$u_{42} = [5520, 5620]$
$u_4 = [1720, 1820]$	$u_{43} = [5620, 5720]$

The next step is to distribute the data to each interval and determine the frequency density, resulting in the densest interval, which is then repartitioned using a modified method. The following outcomes were achieved:

Table 3. Frequency Density and Repartition Interval

Interval	Frequency	Redivided interval
$u_{29} = [4220, 4320]$	5	$u_{29,1} = [4220, 4270],$ $u_{29,2} = [4270, 4320]$
$u_{28} = [4120, 4220]$	4	$u_{28,1} = [4120, 4153.33]$ $u_{28,2} = [4153.33, 4186.67]$ $u_{28,3} = [4186.67, 4220]$
$u_{16} = [2920, 3020]$	3	$u_{16,1} = [2920, 2945],$ $u_{16,2} = [2945, 2970],$ $u_{16,3} = [2970, 2995]$ $u_{16,3} = [2995, 3020]$
$u_{17} = [3020, 3120]$	3	$u_{17,1} = [3020, 3045],$ $u_{17,2} = [3045, 3070],$ $u_{17,3} = [3070, 3095],$ $u_{17,4} = [3095, 3120]$
$u_{19} = [3220, 3320]$	3	$u_{19,1} = [3220, 3245],$ $u_{19,2} = [3245, 3270],$ $u_{19,3} = [3270, 3295],$ $u_{19,4} = [3295, 3320]$
$u_{27} = [4020, 4120]$	3	$u_{27,1} = [4020, 4045],$ $u_{27,2} = [4045, 4070],$ $u_{27,3} = [4070, 4095],$ $u_{27,4} = [4095, 4120]$
$u_{32} = [4520, 4620]$	3	$u_{32,1} = [4520, 4545],$ $u_{32,2} = [4545, 4570],$ $u_{32,3} = [4570, 4590],$ $u_{32,4} = [4590, 4620]$
$u_{33} = [4620, 4720]$	3	$u_{33,1} = [4620, 4645],$ $u_{33,2} = [4645, 4670],$ $u_{33,3} = [4670, 4695],$ $u_{33,4} = [4695, 4720]$
$u_2, u_3, u_4, u_5, u_6, u_8, u_{11},$ $u_{14}, u_{20}, u_{23}, u_{26}, u_{34}, u_{42}$	0	Removed

Next, look for the middle value (m_1) for each interval, we get:

Table 4. Middle Value

u_i	m_i	u_i	m_i
u_1	1470	⋮	⋮
u_7	2070	u_{39}	5270
u_9	2270	u_{40}	5370
u_{10}	2370	u_{41}	5470
u_{12}	2570	u_{43}	5670

Furthermore, defining fuzzy sets, fuzzy sets that can be formed from the universe conversation are 44 fuzzy sets. The fuzzy sets formed is as follows:

$$\begin{aligned}
 A_1 &= \{1/u_1 + 0,5/u_7 + 0/u_9 + 0/u_{10} + \dots + 0/u_{40} + 0/u_{41} + 0/u_{43}\} \\
 A_2 &= \{0,5/u_1 + 1/u_7 + 0,5/u_9 + 0/u_{10} + \dots + 0/u_{40} + 0/u_{41} + 0/u_{43}\} \\
 A_3 &= \{0/u_1 + 0,5/u_7 + 1/u_9 + 0,5/u_{10} + \dots + 0/u_{40} + 0/u_{41} + 0/u_{43}\} \\
 &\vdots \\
 A_{49} &= \{0/u_1 + 0/u_7 + 0/u_9 + 0/u_{10} + \dots + 1/u_{40} + 0,5/u_{41} + 0/u_{43}\} \\
 A_{50} &= \{0/u_1 + 0/u_7 + 0/u_9 + 0/u_{10} + \dots + 0,5/u_{40} + 1/u_{41} + 0,5/u_{43}\} \\
 A_{51} &= \{0/u_1 + 0/u_7 + 0/u_9 + 0/u_{10} + \dots + 0/u_{40} + 0,5/u_{41} + 1/u_{43}\}
 \end{aligned}$$

The next step is to perform fuzzification, the data from the fuzzification results are presented in the following table:

Table 5. Fuzzification Results

<i>t</i>	Actual Data	fuzzy Data	<i>t</i>	Actual Data	fuzzy Data
1	2311	A_3	∴	∴	∴
2	2064	A_2	54	3263	A_{18}
3	3079	A_{14}	55	3078	A_{14}
4	2702	A_6	56	1428	A_1
5	2932	A_8	57	1432	A_1

The next step, determine the FLR and FLRG, as shown in Table 6. And Table 7:

Table 6. FLR

Data Order	FLR	Data Order	FLR
1-2	$A_3 \rightarrow A_2$	∴	∴
2-3	$A_2 \rightarrow A_{14}$	54-55	$A_{18} \rightarrow A_{14}$
3-4	$A_{14} \rightarrow A_6$	55-56	$A_{14} \rightarrow A_1$
4-5	$A_6 \rightarrow A_8$	56-57	$A_1 \rightarrow A_1$

Table 7. FLRG

Current State	Next State	Current State	Next State
A_1	$(1)A_1$	∴	∴
A_2	$(1)A_{14}$	A_{49}	$(1)A_{35}, (1)A_{42}$
A_3	$(1)A_2$	A_{50}	$(1)A_{48}$
A_4	$(1)A_6$	A_{51}	$(1)A_{43}$

The initial forecast will be calculated next. For example, for $t = 2$, June 26, 2021, the forecast computation based on formulas (8), (9), and (10) is $F(2) = m_k P_{ik} = m_k = 2070$. The summary of the initial forecasting results is as follows:

Table 8. Initial Forecasting Results ($F(t)$)

Period	Actual Data	$F(t)$	Period	Actual Data	$F(t)$
6/25/21	2311	Na	∴	∴	∴
6/26/21	2064	2070	8/19/21	1428	2070
6/27/21	3078	3082,5	8/20/21	1432	1428

After we get the initial forecasting, the next step is to adjust the forecasting trend. For example, adjustment value for June 26, 2021, the next step is A_2 and the current state is A_3 then the adjustment calculation uses the forecast adjustment rule (14) we get $D_{t2} = -\left(\frac{l}{2}\right)v = -\left(\frac{100}{2}\right)1 = -(50)$. For the calculation of other forecasting value adjustment using equations (11), (12), (13), and (14). The following is a forecast adjustment Table.

Table 8. Forecasting Trend Adjustment Value

Period	FLR	D_{tn}	Period	FLR	D_{t2}
6/25/21	$A_3 \rightarrow A_2$	Na	⋮	⋮	⋮
6/26/21	$A_2 \rightarrow A_{14}$	-50	8/19/21	$A_{14} \rightarrow A_1$	-650
6/27/21	$A_{14} \rightarrow A_9$	600	8/20/21	$A_1 \rightarrow A_1$	0

Calculate the final forecast value. The final forecast is the sum of the initial forecast value with the forecast adjustment value by following the equation (15). For example, the final forecast value for June 26, 2021 data is $F'_2 = F_2 \pm D_{t2} = 2070 + (-50) = 2020$. By doing the same way, the summary of the final forecasting result is as follows:

Table 9. Final Forecast Value

Period	Y(t)	F'_t	Period	Y(t)	F'_t
6/25/21	2311	Na	⋮	⋮	⋮
6/26/21	2064	2020	8/19/21	1428	1907.5
6/27/21	3078	3682,5	8/20/21	1432	1428

Furthermore, the average based-FTS Markov chain is based on the modified frequency density partition to forecast data for new positive cases on August 21, 2021, the current state is A_1 , from FLRG it is known that the next state of A_1 is A_1 , then based on equations (8), (9), and (10) the forecasting result is 1 times the data of the previous new positive case $Y(t - 1)$ is 1432.

The last step is to calculate the forecast accuracy value using MAPE. The MAPE values of average based-FTS based on a modified frequency density partitioning is 10,7%. For forecasting results using average based-FTS based on a modified frequency density partitioning, are presented in the following figure:

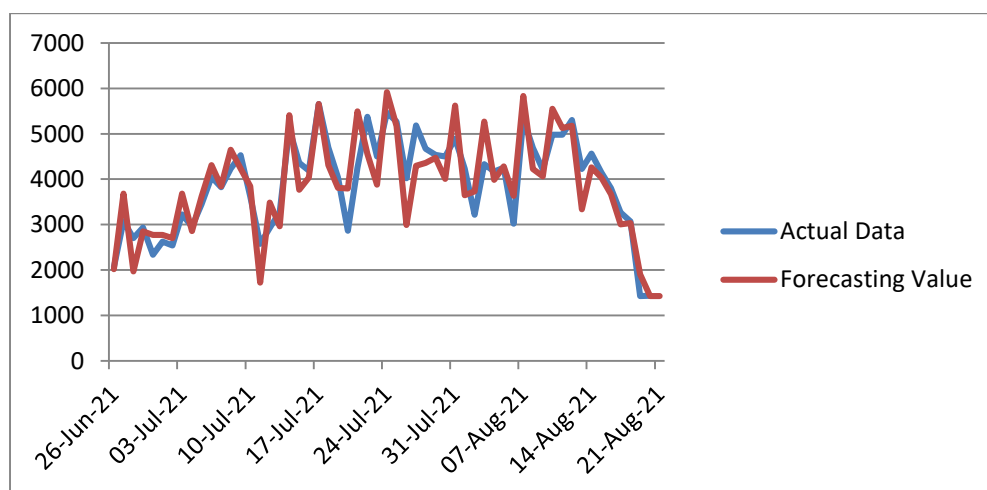


Figure 1. Graph of Forecasting Results Using Average Based-FTS Markov Chain Based on Modified Frequency Density Partitioning

CONCLUSIONS

Forecasting new positive cases of COVID-19 in Central Java using Average Based-FTS Markov Chain Based on Modified Frequency Density Partitioning has a good level of accuracy, this can be seen from the MAPE value obtained which is 10.7%. And for the predicted value of new positive cases on August 21, 2021, it is 1432 new positive cases of COVID-19 in Central Java.

REFERENCES

- [1] D. Handayani, "Penyakit Virus Corona 2019," *J. Respirologi Indones.*, vol. 40, no. 2, 2020.
- [2] D. C. Montgomery, C. L. Jennings, and M. Kulahci, *Introduction Time Series Analysis and Forecasting*, Willey, 2015.
- [3] Q. Song and B. S. Chissom, "Forecasting enrollments with fuzzy time series - Part I," *Fuzzy Sets Syst.*, vol. 54, no. 1, pp. 1-9, 1993.
- [4] J. Sullivan and W. H. Woodall, "A comparison of fuzzy forecasting and Markov modeling," *Fuzzy Sets Syst.*, vol. 64, no. 3, pp. 279-293, 1994.
- [5] S. M. Chen, "Forecasting enrollments based on fuzzy time series," *Fuzzy Sets Syst.*, vol. 81, no. 3, 1996.
- [6] S. M. Chen and C.-C. Hsu, "A New Method to Forecast Enrollments Using Fuzzy Time Series," *Int. J. Appl. Sci. Eng.*, vol. 2, no. 3, pp. 234-244, 2004.
- [7] H. K. Yu, "Weighted fuzzy time series models for TAIEX forecasting," *Phys. A Stat. Mech. its Appl.*, vol. 349, no. 3-4, 2005.
- [8] C. H. Cheng, G. W. Cheng, and J. W. Wang, "Multi-attribute Fuzzy Time Series Method Based On Fuzzy Clustering," *Expert Syst. Appl.*, vol. 34, no. 2, 2008.
- [9] M. Stevenson and J. Porter, "Fuzzy time Series Forecasting Using Percentage Change As The Universe Of Discourse," *Change*, vol. 1971, no. 3.89, 1972.
- [10] R. C. Tsaur, "A fuzzy time series-Markov chain model with an application to forecast the exchange rate between the Taiwan and us Dollar," *Int. J. Innov. Comput. Inf. Control*, vol. 8, no. 7 B, 2012.
- [11] Y. A. R. Langi, "Penentuan Klasifikasi State Pada Rantai Markov Dengan Menggunakan Nilai Eigen Dari Matriks Peluang Transisi," *J. Ilm. SAINS*, vol. 11, no. 1, 2011.
- [12] S. Xihao and L. Yimin, "Average-Based Fuzzy Time Series Models For Forecasting Shanghai Compound Index *," Vol. 4, No. 2, pp. 104-111, 2008.
- [13] T. A. Jilani and S. M. A. Burney, "A refined fuzzy time series model for stock market forecasting," *Phys. A Stat. Mech. its Appl.*, vol. 387, no. 12, 2008.
- [14] J. Noh, W. Wijono, and E. Yudaningtias, "Model Average Based FTS Markov Chain Untuk Peramalan Penggunaan Bandwidth Jaringan Komputer," *J. EECCIS*, vol. 9, no. 1, 2015.
- [15] S. Makridakis, S. Wheelwright C, and V. E. McGee, *Metode dan Aplikasi Peramalan*. Binarupa Aksara, 1999.